


2 AND 3-POLE DEFINITE PURPOSE — 600 VAC, 50–60 HZ

FULL LOAD AMPERES	
TYPE	FLA
12 (2 POLE)	20 FLA
13 (3 POLE)	20 FLA
22 (2 POLE)	25 FLA
23 (3 POLE)	25 FLA
32 (2 POLE)	30 FLA
33 (3 POLE)	30 FLA
42 (2 POLE)	40 FLA
43 (3 POLE)	40 FLA

COIL VOLTAGE CODE (1)	60 HZ	50 HZ
V14	24	24
V02	120	110
V09	208–240	220
V04	277	—
V06	480	440
V07	600	550

QUICK CONNECT TERMINALS AND BINDER HEAD SCREWS FOR EASY WIRING.  
\* = BOX LUGS #14–#4 AWG WIRE SIZE

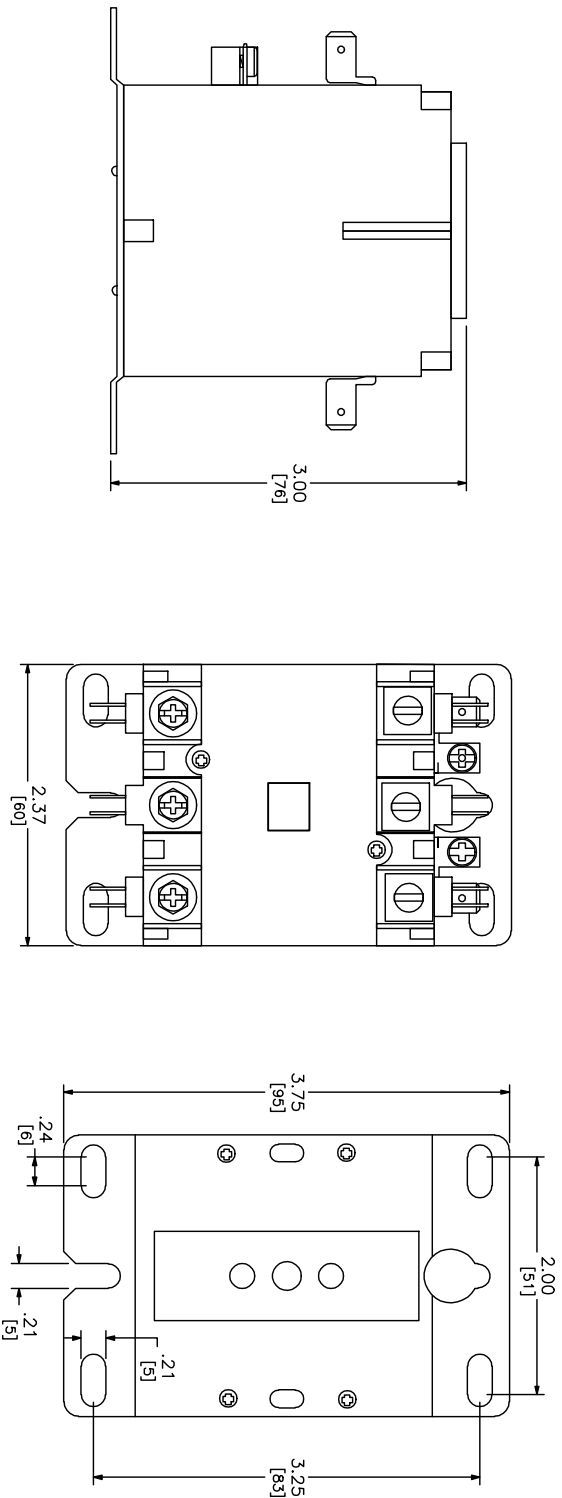

CATALOG NUMBER: 8910-PR(2)(1)  
 RATINGS: SEE CHART  
 UL FILE/CN: UL E78351/NLDX2  
 CSA FILE/CLASS: CSA 172354/521104  
 MEETS STANDARDS: —  
 WEIGHT: 0.98 LB  
 WIRE SIZE: #14–#8  
 TERMINAL TORQUE: 22LB – IN (20 TO 30 FLA) 40LB – IN (40 FLA)  
 MOUNTING HWD: (4) #10 OR M5 SCREWS

DEFINITE PURPOSE CONTACTOR (2 AND 3 POLE)  
 CLASS 8910 TYPE DPA (2) (1)  
 SERIES C



by Schneider Electric

DWG# E0310201-01-C

DUAL DIMENSIONS: INCHES  
 MILLIMETERS