

CHANCE[®]

CATALOG

Anchor Tools


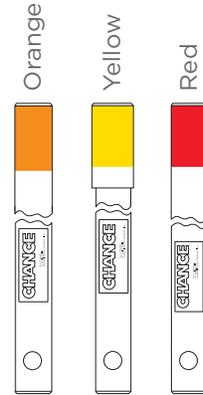


Table of Contents

How to Match Anchors and Drive-End Wrenches	4A-3
STANDARD and HYBRID PISA Drive Tools (10,000 ft·lb).	4A-4
Building a Drive Tool String	4A-6
Tough One Drive Tools.	4A-7
Bent Arm Pin and Coil Lock Assemblies	4A-8
SS, RR, and No-Wrench Drive Tools	4A-9
Chance Torque Indicators	4A-10
Bolt Circle Adapters, Expanding Bar, and Pulling Eye	4A-11
Portable Anchor Installer for Small Foundations.	4A-12
Portable Hydraulic Power Supply	4A-13

How to Match Anchors and Drive-End Wrenches

PISA® 6 Anchor				Yellow	Yellow	Red	Red	6,000	7,000	6,000	10,000	15,000	
				Yellow	Yellow	Red	Red	7,000	7,000	6,000	10,000	15,000	
PISA 7 Anchor				Yellow	Yellow	Red	Red	7,000	7,000	6,000	10,000	15,000	
				Yellow	Yellow	Red	Red	7,000	7,000	6,000	10,000	15,000	
Mid-Strength PISA Anchor			Orange	Orange				6,000	6,000	6,000	10,000	15,000	
			Orange	Orange				6,000	6,000	6,000	10,000	15,000	
C10252XX Series Tough One Anchor Small Hub			Orange	Orange				10,000	10,000	10,000	10,000	15,000	
			Orange	Orange				10,000	10,000	10,000	10,000	15,000	
C10250XX Series Tough One Anchor Large Hub				Yellow	Yellow	Red	Red	10,000	10,000	10,000	10,000	15,000	
				Yellow	Yellow	Red	Red	10,000	10,000	10,000	10,000	15,000	
C10250XX Series Tough One Anchor Large Hub						Red	Red	15,000	15,000	15,000	15,000	15,000	
						Red	Red	15,000	15,000	15,000	15,000	15,000	

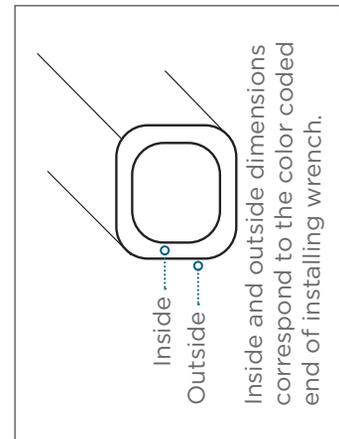

STANDARD and HYBRID PISA Drive Tools (10,000 ft-lb)

A complete tool system consists of: Kelly Bar Adapter, Torque Indicator, Locking Dog Assembly, and Drive-End Wrench. For instructions for selecting the proper Kelly Bar Adapter, see page 4A-5.

The Drive-End Wrench transmits the torque from the Kelly bar of the digger to the hub of the Power-Installed Screw Anchor (PISA®) so that the anchor rod need be only large enough in diameter to support the guy load.



STANDARD Kelly Bar Adapter With Bent Arm Pin (5-1/4" Bolt Circle)

Catalog No.	Kelly Bar Shape	Kelly Bar Dimension (in)			Weight (lb)
		X	Y	Z	
630013	Hex	2	5	6-1/8	10
630011HD	Hex	2-1/2	4-1/4	8-1/8	18
630012HD	Hex	2-5/8	4-1/4	8-1/8	18

Each STANDARD Kelly Bar Adapter has six holes for 1/2" bolts on a 5-1/4" bolt circle and includes twelve 1/2" Grade 5 bolts, nuts, and lock washers, and a bent arm pin with coil lock.

Replacement Hardware

Catalog No.	Description
P0010259P	Hex bolt
055371P	Lock washer
055635P	Hex nut



STANDARD Locking Dog Assembly

Catalog No.	Description	Weight (lb)
C3030069HD	Complete STANDARD Locking Dog Assembly	20
C3030070	Locking dog replacement kit (includes parts needed to replace both locking dogs)	4
P1300007P	Replacement ring only	0.1
C3030069HDN	Complete Locking Dog Assembly - Lever Handle Style	-
PSC3032024	Component Kit	-
PSC3032023	Heat Shrink Cove	-



Easy Grip™ Locking Dog Assembly C3030069HDN


The STANDARD Locking Dog Assembly has six holes for 1/2" bolts on a 5-1/4" bolt circle, and comes with six 1/2" Grade 5 bolts, nuts, and lock washers.

STANDARD and HYBRID PISA Drive Tools (10,000 ft-lb)

STANDARD and HYBRID Drive-End Wrenches

Catalog No.	Length (ft)	Description	Weight (lb)
C1021583	7	STANDARD Drive-End Wrench installs: - All small hub Tough One® anchors	55
C1021595	3-1/2	- Standard-Strength PISA - Mid-Strength PISA	29
†C3031064	7	HYBRID Drive-End Wrench installs: - 10,000 ft-lb large hub Tough One anchors	56
†C3031063	3-1/2	- PISA 6 - PISA 7	30

†NOTE: These wrenches will fit 15,000 ft-lb Tough One anchors dimensionally but MUST NOT BE USED FOR TORQUE IN EXCESS OF 10,000 ft-lb!

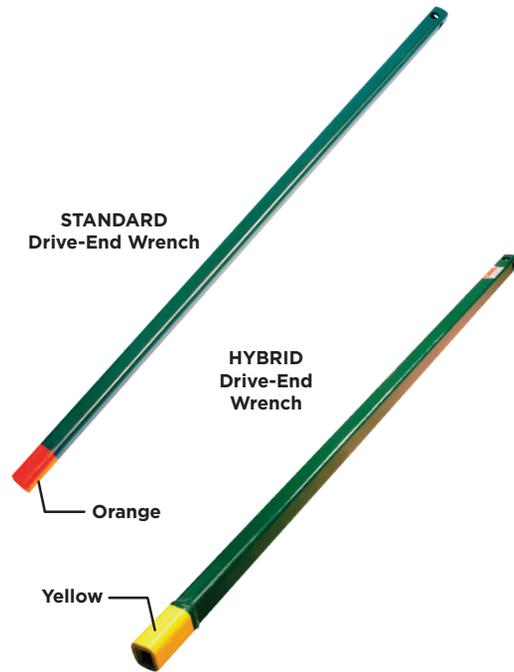

STANDARD Extension Wrenches

Catalog No.	Length (ft)	Description	Weight (lb)
630027	3-1/2	Extension attaches to Drive-End Wrench when additional depth is required.	42
630028	7		70
630002P	N/A	Replacement dog bolt (sold individually, order 2 if full set is needed)	0.5


Extension Wrench assemblies can be added where soil conditions dictate that anchors be set more than one rod length deep or where digger to ground clearances are limited.



Building a Drive Tool String

Selecting the correct Kelly Bar Adapter is key to building a successful drive string. Follow these two easy steps:

1. Remove the auger from the digger and carefully measure the X and Y dimensions of the Kelly bar.
2. Match the shape of the Kelly bar and the X and Y dimensions with the Kelly Bar Adapter table provided on page 4A-4 or 4A-6. The Y dimension on the Kelly Bar Adapter must be equal to or greater than the Y dimension on the Kelly bar itself.

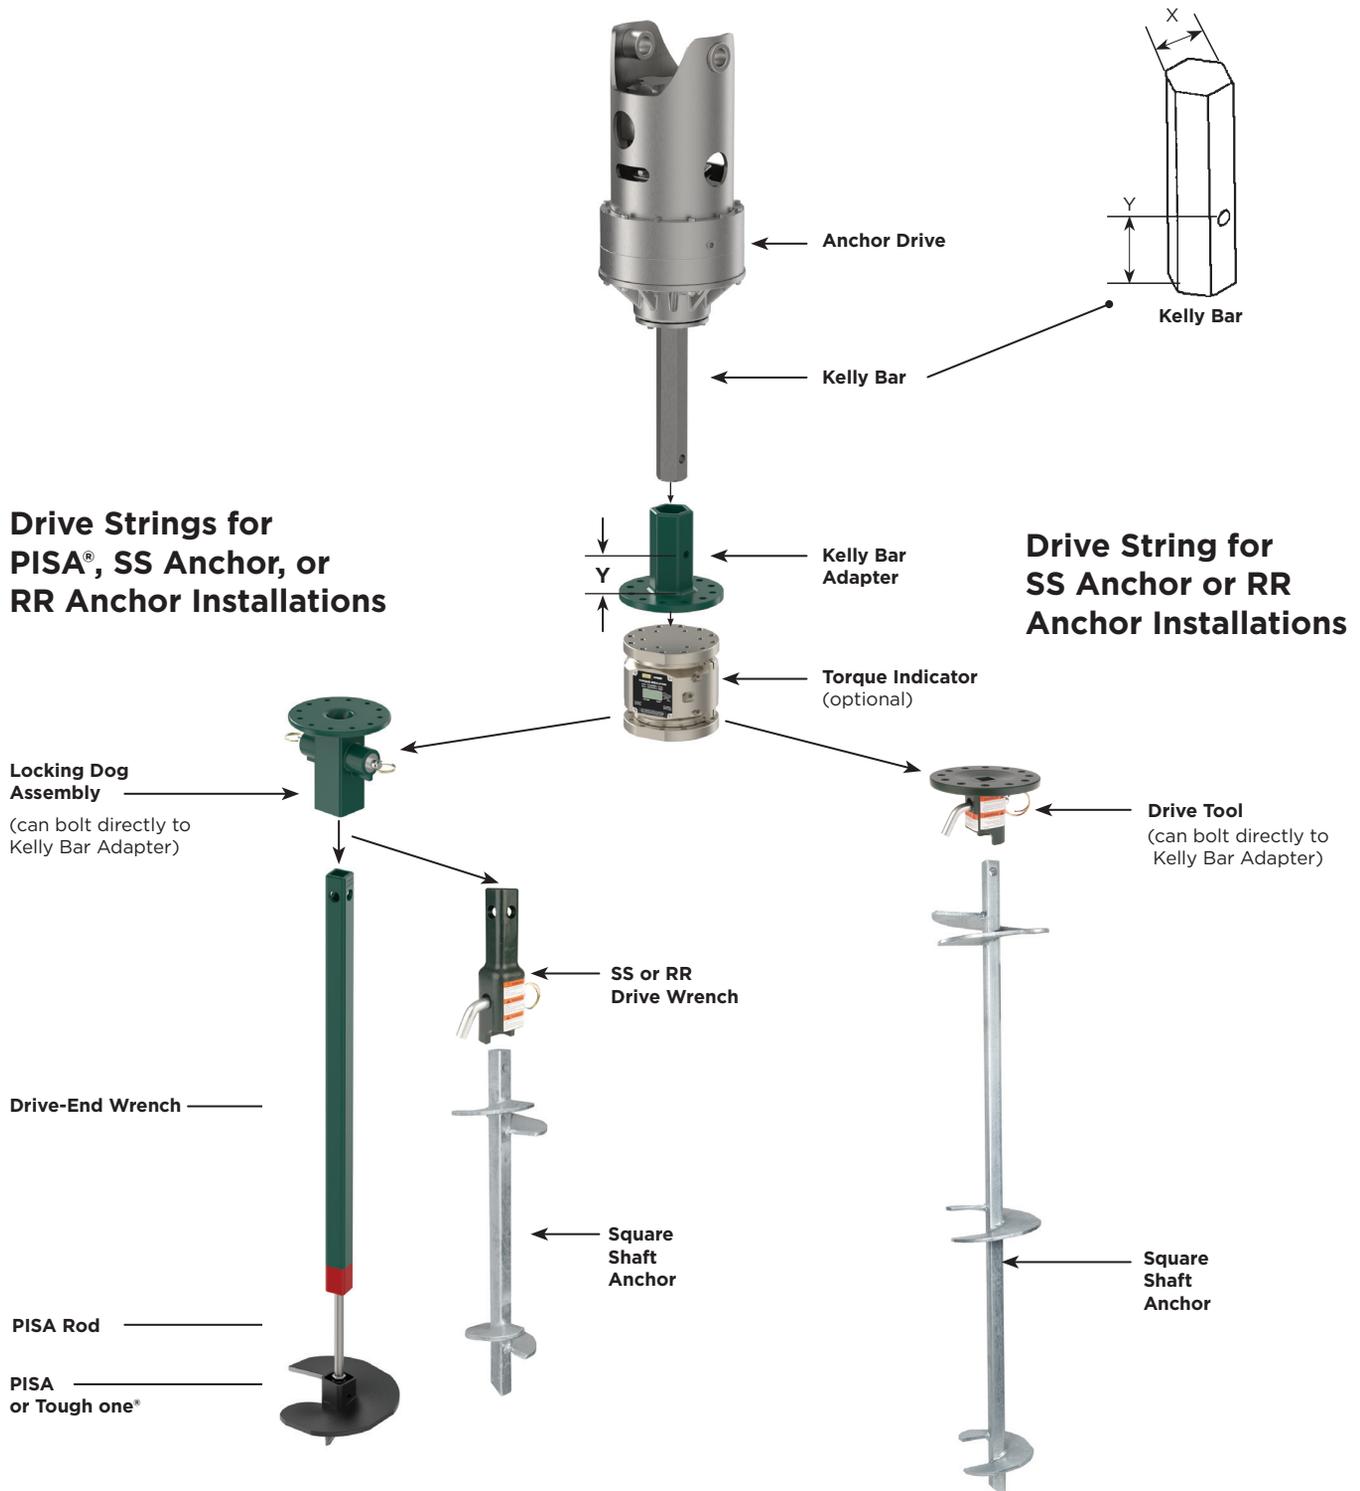


Tough One Drive Tools

A complete tool system consists of: Kelly Bar Adapter, Torque Indicator, Locking Dog Assembly, and Drive-End Wrench. For instructions for selecting the proper Kelly Bar Adapter, see page 4A-4.

Tough One® Kelly Bar Adapter with Bent Arm Pin (7-5/8" Bolt Circle)

Catalog No.	Kelly Bar Shape	Kelly Bar Dimension (in)			Weight (lb)	Torque Rating (ft-lb)
		X	Y	Z		
C3030936	Hex	2-1/2	3-7/8	8-1/4	23	12,000
C3030937	Hex	2-5/8	3-7/8	8-1/4	23	15,000
C3030940	Hex	3	4-1/2	8	27	25,000
C3030955	Square	2-1/2	4-3/4	7	22	17,000
C3030958	Square	3	3-1/2 and 2-1/16	8	23	20,000
C3031571	Square	3-1/2	2 and 4	6-11/16	33	30,000

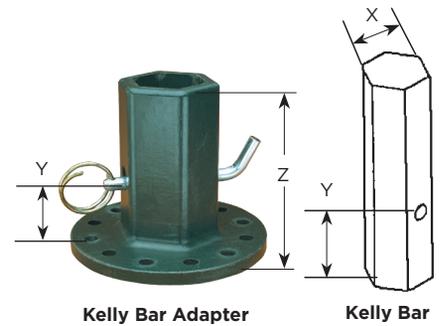

Each Tough One Kelly Bar Adapter has twelve holes for 5/8" bolts on a 7-5/8" bolt circle and includes twelve 5/8" Grade 5 bolts, nuts, and lock washers, and a bent arm pin with coil lock.

*Digital Torque Indicator

Catalog No.	Kelly Bar Shape	Weight (lb)	Torque Rating (ft-lb)
C3031836	Torque Indicator adaptable to 5-1/4" or 7-5/8" bolt circle	65	30,000

*See page 4A-10 for additional information on Chance Torque Indicators.

Tough One Locking Dog Assembly

Catalog No.	Kelly Bar Shape	Weight (lb)	Torque Rating (ft-lb)
C3030981	Complete Tough One Locking Dog Assembly	28	15,000
C3031026	Locking dog replacement kit (includes parts needed to replace both locking dogs)	5	N/A

Tough One Locking Dog Assembly has twelve holes for 5/8" bolts on a 7-5/8" bolt circle and comes with twelve 5/8" Grade 5 bolts, nuts, and lock washers.

Tough One Drive-End Wrenches

Catalog No.	Length (ft)	Description	Weight (lb)	Torque Rating (ft-lb)
C3030982	3-1/2	Tough One Drive-End Wrench installs: - All large hub Tough One anchors - PISA 6 - PISA 7	36	15,000
C3030983	7		73	15,000

Tough One Drive-End Wrenches

Catalog No.	Length (ft)	Description	Weight (lb)	Torque Rating (ft-lb)
C3030987	3-1/2	Extension attaches to Drive-End Wrench when additional depth is required.	53	15,000
C3030988	7		89	15,000
C3030988	N/A	Replacement dog bolt (sold individually, order 2 if full set is needed)	0.5	N/A

For SS and RR anchor tool options when using the Tough One tool system, see page 4A-9.

Replacement Hardware


Catalog No.	Description
P0010259P	Hex bolt
055371P	Lock washer
055635P	Hex nut



*Torque Indicator



Locking Dog Assembly

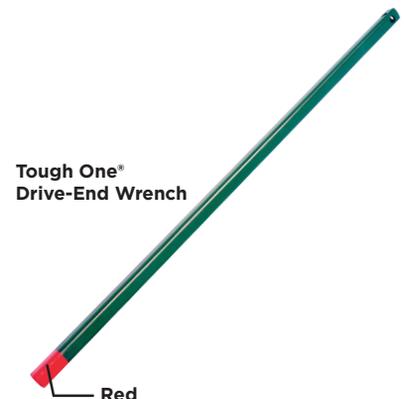

Tough One® Drive-End Wrench

Red

Bent Arm Pin and Coil Lock Assemblies

Use with STANDARD and Tough One® Kelly Bar Adapters and SS, RR, and Bumper Post Installing Tools.

The CHANCE bent arm pin and coil lock are used to securely attach a Kelly Bar Adapter to a Kelly bar or an SS, RR, or bumper post anchor to an anchor drive tool.

Bent arm pins with coil locks are included with new tools as required. Order pins and coil locks for existing tools as shown below.


Bent Arm Pin and Coil Lock Compatibility

Kelly Bar Adapter	Bent Arm Pin and Coil Lock Assembly	SS/RR Tool	Bent Arm Pin and Coil Lock Assembly
630011HD	C3031223	639001	C3031226
630012HD	C3031223	C3030020	C3031226
630013	C3031223	C3030195	C3031225
630013A	C3031223	C3030201	C3031224
630014	C3031222	C3030202	C3031224
630015	C3031222	C3031077	C3031224
630016	C3031227	T3031403	C3031225
630017	C3031227		
C3030936	C3031223		
C3030937	C3031223		
C3030940	C3031222		
C3030955	C3031227		
C3030958	C3031227		
C3031571	C3031227		

Bumper Post Tool	Bent Arm Pin and Coil Lock Assembly
C3030737	C3031227
C3030739	C3031227



Kelly Bar Adapter

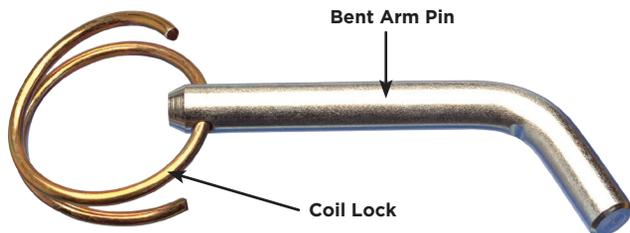

To order coil lock only, order Catalog No. P3031215P.

⚠ WARNING

Always use the approved combination of coil lock and bent arm pin. Never attempt to use any other retainer, such as a hair pin, cotter pin, etc., with a bent arm pin.

⚠ WARNING

Chance bent arm pins with coil locks are the only tested and approved means for through-pin attachment of drive tools. Do not attempt to use any other means of attachment.

Bent Arm Pin Dimensions

Catalog No.	Size [Length x Diameter] (in)
C3031222	5 x 5/8
C3031223	4-1/2 x 1/2
C3031224	4-1/2 x 1
C3031225	3-1/2 x 3/4
C3031226	3 x 5/8
C3031227	5 x 3/4

SS, RR, and No-Wrench Drive Tools

For Installing SS or RR Anchors

These tools include our proprietary Alignment Window that helps reduce the chance of finger pinch when an anchor is inserted into the tool. The Alignment Window also makes it faster and easier to line up the anchor and anchor tool.

These tools mount to the appropriate Kelly Bar Adapter or a Torque Indicator, each sold separately. Mounting bolts, nuts, and lock washers are included.

Catalog No.	Description	Bolt Circle	Weight (lb)	Torque Rating (ft-lb)
639001	SS5/SS150/RR drive tool	(6) 1/2" holes on 5-1/4" B.C.	7	7,000
C3030195*	SS175 drive tool	(12) 5/8" holes on 7-5/8" B.C.	18	10,500
C3030201*	SS200 drive tool	(12) 5/8" holes on 7-5/8" B.C.	30	16,000
C3030202*	SS225 drive tool	(12) 5/8" holes on 7-5/8" B.C.	30	21,000

*Requires use of T3030166 adapter, and limited to 10,000 ft-lb, when used with STANDARD Kelly Bar Adapter (with a 5-1/4" bolt circle).

These tools slide into a Locking Dog Assembly and are retained by spring-loaded dogs.

Catalog No.	Length (ft)	Required Locking Dog Assembly	Weight (lb)	Torque Rating (ft-lb)
C3030020	SS5/SS150/RR drive tool	C3030069HD (STANDARD)	8	7,000
C3031035	SS175 drive tool	C3030981 (Tough One®)	11	7,000
T3031403	SS200 drive tool	C3030981 (Tough One)	26	10,500
C3031077	SS225 drive tool		23	15,000

Each of these drive tools includes an integral set of locking dogs that attach the drive tool to the anchor. There is no need to use a bent arm pin and coil lock to attach these tools to an anchor.

These tools mount to the appropriate Kelly Bar Adapter or a Torque Indicator, each sold separately. Mounting bolts, nuts, and lock washers are included.

Catalog No.	Description	Bolt Circle	Weight (lb)	Torque Rating (ft-lb)
C3031650	SS5/SS150 drive tool with locking dogs	(6) 1/2" holes on 5-1/4" B.C.	10	7,000
C3031645	SS175 drive tool with locking dogs	(12) 5/8" holes on 7-5/8" B.C.	21	10,500

For Installing No-Wrench Anchors

This drive tool attaches to a No-Wrench anchor via a cross-pin through the anchor eye. Pivoting guide plates adjust to fit anchor rods from 3/4" to 1-1/4" diameter.

This tool mounts to the appropriate STANDARD Kelly Bar Adapter (5-1/4" bolt circle) or a Torque Indicator, each sold separately. Mounting bolts, nuts, and lock washers are included.

Catalog No.	Weight (lb)	Torque Rating (ft-lb)
E3030255	9	2,300



639001



C3030020



C3031650



E3030255

Chance Torque Indicators

Digital Torque Indicator For Installing Torque up to 30,000 ft-lb

Using the wireless Chance Torque Indicator, you can install screw anchors to a pre-determined torque value, which gives a positive indication of anchor holding capacity in any soil type.


The Indicator mounts between the Kelly Bar Adapter and drive tool Locking Dog Assembly. The integrated LCD is easy to read in full daylight and provides a direct readout of installation torque.

Features and Benefits

- Measuring torque is the most accurate way to determine the capacity of helical piles and anchors
- Torque is displayed on the integrated LCD and transmitted via Bluetooth® to Android and iOS phones and smart devices
- Multiple Bluetooth devices can be linked to a Torque Indicator
- Download the free Torque Indicator Remote Pro app from the Apple App Store or Google Play Store
- Torque data can be recorded with the app and shared via email
- Certificate of Calibration supplied with each new unit in case
- Operational temperature range: -30° to 70° C (-22° to 158° F)
- Measures torque up to 30,000 ft-lb
- Accuracy: ±500 ft-lb at any reading
- Torque is measured using strain gauges
- No shear pins to replace
- Powered by two standard 9V batteries
- Solid one-piece spool design to withstand most bending loads
- Top and bottom flanges have six holes tapped 1/2"- 13 on a 5-1/4" bolt circle and twelve holes tapped 5/8"- 11 on a 7-5/8" bolt circle



Torque Indicator

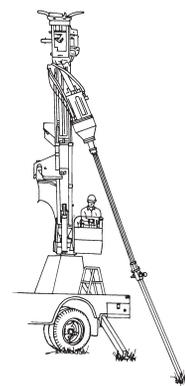

App Display

Catalog No.	Description
C3031836	Torque Indicator

Shear Pin Torque Limiter For Installing Torque up to 10,000 ft-lb

The Shear Pin Torque Limiter provides all the benefits of measured installation torque in a rugged, compact form factor.

Features and Benefits

- Protects anchors and installing tools by disconnecting the power when the installing torque reaches a preselected level
- Usable in very rocky soil
- Durable — does not require special storage or handling
- Top and bottom have six holes tapped 1/2" - 13 on a 5-1/4" bolt circle

Catalog No.	Description	Weight (lb)
C3030044	Shear Pin Torque Limiter	54
*C3030045	One carton of shear pins (approx. 1700 pins)	50
*T3031420	One box of shear pins (approx. 510 pins)	15

*Each shear pin provides 500 ft-lb of torque.



Bolt Circle Adapters, Expanding Bar, and Pulling Eye

Bolt Circle Adapters

For installing Torque up to 10,000 ft-lb

These adapters are used to connect two tools having incompatible bolt circles. The C3030115 is for use between two tools having tapped 5-1/4" bolt circles. The T3030166 and T3030166N are for use between a tool having a 5-1/4" bolt circle and one having a 7-5/8" bolt circle. These adapters are limited to 10,000 ft-lb of installation torque.

Catalog No.	Description	Weight (lb)
C3030115	Bolt circle adapter with two 1/2" x 5-1/4" bolt circles	11
T3030166	Bolt circle adapter with one 1/2" x 5-1/4" bolt circle and one 5/8" x 7-5/8" bolt circle	18
T3030166N	Bolt circle adapter with one 1/2" x 5-1/4" bolt circle and one 5/8" x 7-5/8" bolt circle on one steel plate. <i>Note: Cannot be used with the Shear Pin Torque Limiter</i>	10



C3030115



T3030166



T3030166N

Expanding and Tamping Bar

The Chance fiberglass-handle Expanding and Tamping Bar simplifies the job of expanding anchors. The curved expander and tamper head distributes the weight of the bar evenly around the anchor rod to reduce handle vibration. The hook of the expanding and tamping bar wraps around the anchor rod to keep the expanding head from slipping off the anchor top plate. This tool is also effectively used for tamping in soil above the installed anchor. The cast head is attached directly to the fiberglass handle.

Catalog No.	Description	Length (ft)	Weight (lb)
C3020003	Expanding and Tamping Bar	10	22
C3020004	Expanding and Tamping Bar	12	24
*E3020001P	Fiberglass handle	10	7
*E3020006P	Fiberglass handle	12	8
P3020002P	Expander and tamper head	N/A	14

*Includes plug mix to reset handle.




Fiberglass Handle

Expander and Tamper Head

Pulling Eye

This inexpensive cost-cutter provides a large offset eye to accommodate three-ton chain hoist hooks and leaves the anchor eye free with plenty of clearance for attaching formed-wire grips. The adapter bushing can be adjusted to fit 1/2" to 1" rods and can be removed to fit 1-1/4" rods. The Pulling Eye is easy to use, and one person can assemble it and hook a hoist to it in minutes. The Pulling Eye working load limit is 6,000 lb (ultimate strength is 18,000 lb).

Catalog No.	Description	Weight (lb)
E96	Pulling Eye with adapter bushing, bolt, and nut	5
C3031661	Adapter bushing, bolt, and nut	1

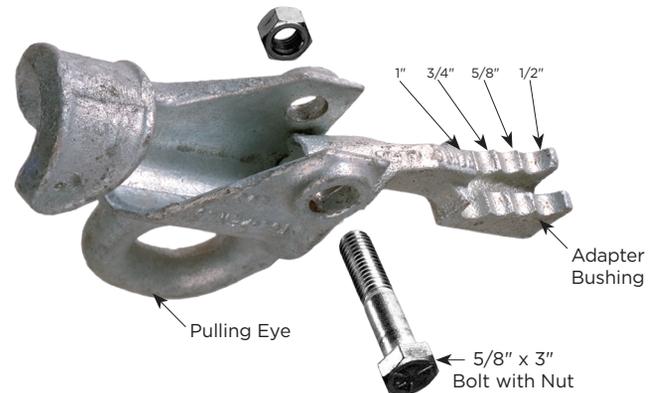

Pulling Eye

Adapter Bushing

5/8" x 3" Bolt with Nut

Portable Anchor Installer for Small Foundations

For Installing Torque up to 2,500 ft·lb in Restricted-Access Locations

This compact installer can be used for most shaft-driven guy anchors and smaller screw foundations in areas where large equipment cannot go or is impractical. A hydraulic power supply, such as the CHANCE Portable Hydraulic Power Supply (see page 4A-12), providing 1,900 psi at 8 gpm flow rate is required to deliver the maximum torque output of 2,500 ft·lb.

Features and Benefits

- Torque bar transmits the counter-torque generated by anchor installation from the drive head to the earth or other restraint, freeing the operator for the task of guiding the anchor path
- Torque bar telescopes from 8 feet to 10 feet as needed
- Pivoting drive head enables easy adjustment of installation angle
- Built-in bypass valve limits output to 2,500 ft·lb maximum
- Two-way foot control gives the operator direct control over drive and reverse directions
- Includes two 12.5-ft hoses and two 25-ft hoses with quick couplers for all connections from power supply to foot control to drive head
- Sealed, oil-filled gear case
- 2" hex output shaft - Kelly Bar Adapter 630013 and the appropriate drive tool (each sold separately) are required for anchor installation

Portable Anchor Installer

Catalog No.	Kelly Bar Shape	Weight (lb)
C3031244	Complete Portable Anchor Installer kit (drive head, yoke, torque bar, hoses, and foot control)	230

Replacement Parts

Catalog No.	Kelly Bar Shape	Weight (lb)
C3031233	2,500 ft·lb drive head assembly	108
C3031247	Foot control assembly	47
C4176121	One 25-ft hose assembly	12
E3030680	Yoke assembly	21
E3031041	Torque bar assembly	30
E3031253	Two 12.5-ft hose assemblies	12



Portable Hydraulic Power Supply

The Portable Hydraulic Power Supply is designed specifically to complement the Portable Anchor Installer (see page 4A-11). It provides the appropriate hydraulic output to efficiently operate the anchor installer's drive motor. As shown in the photo, the power supply cart includes secure mounting points for storage and transport of the anchor installer drive head and foot control, and the hydraulic hoses can be placed on the cart handles. The drive head, foot control, and hoses are not included with the power supply.

Features and Benefits

- Cart has large, pneumatic tires to facilitate movement on job sites
- Typical output pressure: 2,500 psi
- Oil flow rate: 8 gpm @ 3,400 rpm
- 5 gallon oil reservoir (shipping cap and vented fill cap included)
- Forced-air oil cooler enables extended use
- 16 hp Briggs and Stratton Industrial/Commercial engine (Model 326437, Type 2527)
- 12 V battery and push-button electric start



Catalog No.	Description	Weight (lb)
C3031201	Portable Hydraulic Power Supply	275



Hubbell Power Systems, Inc. (HPS) manufactures a wide variety of transmission, distribution, substation, OEM and telecommunications products used by utilities.

GET IN TOUCH:



hpscs@hubbell.com



(573) 682-5521



www.hubbell.com/hubbellpowersystems



**Hubbell Power Systems
210 N. Allen
Centralia, MO 65240**

