


16,000 lb. Series Guy Strains - Thimble / Thimble

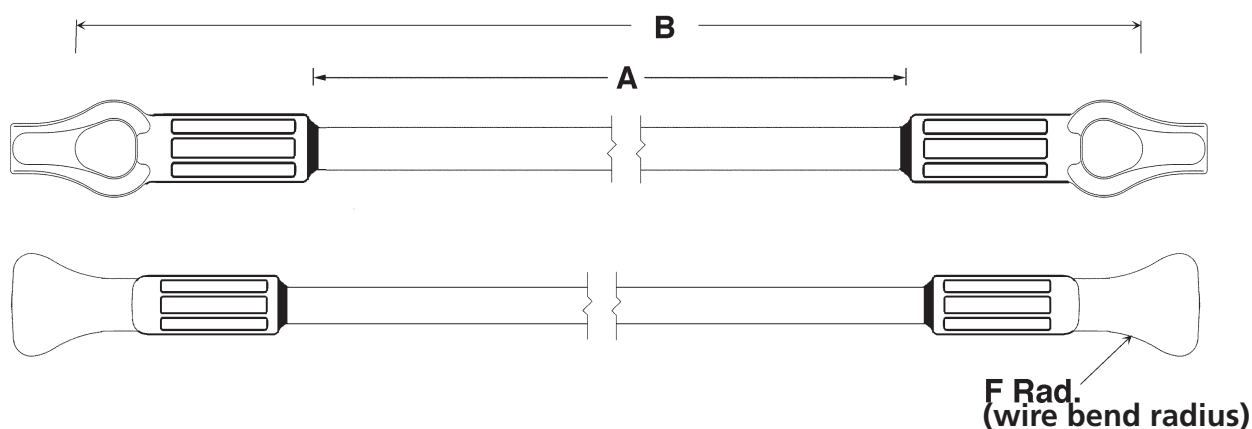

5/8" dia. Fiberglass rod.

Castings are hot-dip galvanized ductile iron.

RUS Accepted.

| Catalog Number | Length A | Length B | Radius F | Weight (Each) |
|---|----------------|------------------|---------------|-------------------|
| 16,000 lbs. (7258 kg) Minimum Ultimate Strength* | | | | |
| GS16012TT | 12" (30.5 cm) | 19.2" (48.8 cm) | 0.75" (19 mm) | 2.8 lbs. (1.3 kg) |
| GS16018TT | 18" (45.7 cm) | 25.2" (64 cm) | 0.75" (19 mm) | 2.9 lbs. (1.3 kg) |
| GS16036TT | 36" (91.4 cm) | 43.2" (109.7 cm) | 0.75" (19 mm) | 3.3 lbs. (1.5 kg) |
| GS16042TT | 42" (106.7 cm) | 49.2" (125 cm) | 0.75" (19 mm) | 3.4 lbs. (1.5 kg) |
| GS16054TT | 54" (137.2 cm) | 61.2" (155.4 cm) | 0.75" (19 mm) | 3.7 lbs. (1.7 kg) |
| GS16078TT | 78" (198.1 cm) | 85.2" (216.4 cm) | 0.75" (19 mm) | 4.2 lbs. (1.9 kg) |

Consult factory for additional lengths.

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod

***Recommended maximum working load is 50% of minimum ultimate ratings listed.**



Phone: 573-682-5521 Email: hpsliterature@hubbell.com Web: hubbellpowersystems.com