


Product Environmental Profile

HARMONY ZB5AD, ZBADJ

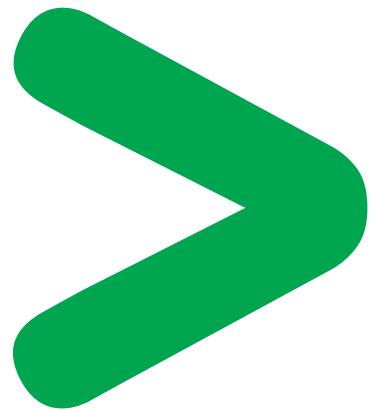

Schneider
Electric

Product Environmental Profile - PEP

Product Overview

The main function of the ZB5AD and ZB5A J products range is to command an action on a machine.

This range consists of: selector switches (with standard or long handle) heads.

The representative product used for the analysis is ZB5AD2.


The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with the similar technology.

The environmental analysis was performed in conformity with ISO14040.

This analysis takes in account the complete life cycle of the product.

Constituent materials

The mass of the product range is from 18 G and 20 G no including packaging. It is 18,4 G for the analysed ZB5AD2.

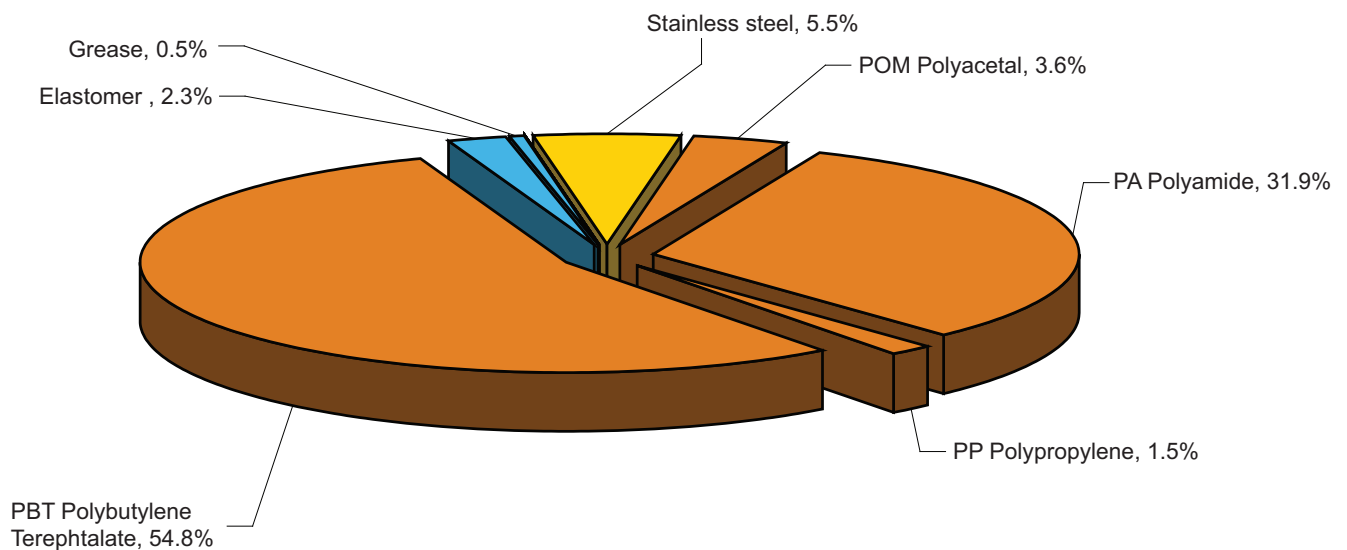

Products of this range are designed in conformity with the requirements of the ROHS directive (European Directive 2002/95/EC of 27 January 2003) and do not contain, or in the authorised proportions, lead, mercury, cadmium, chromium hexavalent, flame retardant (polybromobiphenyles PBB, polybromodiphenylthethers PBDE) as mentioned in the Directive

Manufacturing

The ZB5AD2 product range is manufactured at a Schneider Electric production site on which an ISO14001 certified environmental management system has been established.

Distribution

The weight and volume of the packaging have been reduced, in compliance with the European Union's packaging directive.

The ZB5AD2 packaging weight is 9,5 g. It consists of cardboard and paper.

The product distribution flows have been optimised by setting up local distribution centres close to the market areas.

Utilisation

The products of the ZB5AD2 range do not generate environmental pollution requiring special precautionary measures (noise, emissions, and so on) in using phase.

Product Environmental Profile - PEP

End of life

At end of life, the products in the ZB5AD2 have been optimized to decrease the amount of waste and valorise the components and materials of the product.

The product range doesn't need any specific end of life special treatment. According to the countries practices this product can enter the usual end of life treatment processes.

The potential of recyclability of the products has been evaluated using the "Codde" recyclability and recoverability calculation method" (version V1, 20 Sep. 2008) and published by ADEME (French Agency for Environment and Energy Management).

According this method, the potential recyclability ratio is: 5,1 %. As described in the recyclability calculation method, this ratio includes metals and plastics chosen for their proven industrial recycling processes, but do not include materials which don't have such proven treatment processes (ie most type of plastics which are not recycled...).

Environmental impacts

The life cycle assessment has been achieved on the following life phase: Materials and Manufacturing (M) , Distribution (D), Utilisation (U).

Modelisation hypothesis and impact result:

- The calculation has been done on ZB5AD2,
- Product packaging: is included,
- Installation components: no special components included,
- Scenario for the use phase: this product range is included in the category 3 (assumed lifetime service is 20 years and no using scenario),
- The electrical power model used is European model

Presentation of the environmental impacts

Environmental indicators	Unit	HARMONY ZB5AD, ZBADJ					
		S = M+D+U+I+U+E	M	D	I	U	E
Raw Material Depletion	Y-1	6,73E ⁻¹⁶	6,72E ⁻¹⁶	1,55E ⁻¹⁶	0	0	3,76E ⁻²⁰
Energy Depletion	MJ	2,06E ⁺⁰²	2,05E ⁺⁰²	1,13E ⁺⁰²	0	0	2,76E ⁻⁰²
Water Depletion	dm ³	2,14E ⁺⁰¹	2,13E ⁺⁰¹	10,77	0	0	2,62E ⁻⁰³
Global Warming	g≈CO ₂	1,16E ⁺⁰⁴	1,15E ⁺⁰⁴	8,98E ⁺⁰³	0	0	2,18E ⁺⁰⁰
Ozone Depletion	g≈CFC-11	9,89E ⁻⁰⁴	9,41E ⁻⁰⁴	6,35E ⁻⁰³	0	0	1,54E ⁻⁰⁶
Air Toxicity	m ³	1,17E ⁺⁰⁶	1,16E ⁺⁰⁶	1,69E ⁺⁰⁶	0	0	4,11E ⁺⁰²
Photochemical Ozone Creation	g≈C ₂ H ₄	6,73E ⁺⁰⁰	6,67E ⁺⁰⁰	7,67	0	0	1,86E ⁻⁰³
Air Acidification	g≈H ⁺	9,55E ⁻⁰¹	9,46E ⁻⁰¹	1,15	0	0	2,78E ⁻⁰⁴
Water Toxicity	dm ³	2,42E ⁺⁰³	2,41E ⁺⁰³	1,12E ⁺⁰³	0	0	2,73E ⁻⁰¹
Water Eutrophication	g≈PO ₄	9,43E ⁻⁰²	9,32E ⁻⁰²	1,49E ⁻⁰¹	0	0	3,63E ⁻⁰⁵
Hazardous Waste Production	kg	3,93E ⁻⁰¹	3,93E ⁻⁰¹	3,34E ⁻⁰³	0	0	8,11E ⁻⁰⁷

The life cycle assessment has been achieved with the EIME software (Environmental Impact and Management Explorer), version 4.0, and with its database, version 10.0 .

The production phase is the life cycle phase which has the greatest impact on the majority of environmental indicators.

Product Environmental Profile - PEP

System approach

As the product of the range are designed in accordance with the ROHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction within an assembly or an installation submitted to this Directive.

N.B.: please note that the environmental impacts of the product depend on the use and installation conditions of the product.

Impacts values given above are only valid within the context specified and cannot be directly used to draw up the environmental assessment of the installation.

Glossary

Raw Material Depletion (RMD)

This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.

Energy Depletion (ED)

This indicator gives the quantity of energy consumed, whether it be from fossil, hydroelectric, nuclear or other sources. This indicator takes into account the energy from the material produced during combustion. It is expressed in MJ.

Water Depletion (WD)

This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm³.

Global Warming Potential (GWP)

The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO₂.

Ozone Depletion (OD)

This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.

Photochemical Ozone Creation (POC)

This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C₂H₄).

Air Toxicity (AT)

The AT indicator is representing the air toxicity in a human environment, taking into account the usually accepted concentrations tolerated for several gases and the quantity released. The given indication corresponds to the air volume necessary to dilute "contaminated air".

Air Acidification (AA)

The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H⁺.

Water Eutrophication (WE)

This indicator is representing the water eutrophication (enrichment in nutritive elements) of lakes and marine waters by the release of specific substances in the effluents. It is expressed in grams of PO₄. as if all substances were PO₄. using equivalency in their nitrification potential.

Hazardous Waste Production (HWP)

This indicator calculates the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.



We are committed to safeguarding our planet by "Combining innovation and continuous improvement to meet the new environmental challenges".

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

This document is based on ISO 14020 which relates to the general principles of environmental declarations and the ISO 14025 technical report relating to type III environmental declarations. Product Environmental Profiles Drafting Guide version 12.

It has to be noticed that the data of this PEP cannot be directly compared with datas of programs which don't use the same LCA rules

Published by: Schneider Electric