

140DDI15310

discrete input module Modicon Quantum - 32 I - 5 V DC

Product availability : Stock - Normally stocked in distribution facility

Price* : 1720.41 USD



Main

Range of product	Modicon Quantum automation platform
Product or component type	Low voltage dc discrete input modules
Discrete input number	32

Complementary

Group of channels	4
Logic input	Negative (source)
Discrete input voltage	5 V TTL DC
Input voltage limits	4.5...5.5 V
Voltage state 1 guaranteed	0.8 V DC
Voltage state 0 guaranteed	≥ 4 V DC at 5.5 V supply voltage
Current state 1 guaranteed	4 mA
Addressing requirement	2 input words
Input impedance	7500 Ohm
Leakage current	200 mA at $U_s = 5.5$ V and $U_{in} = 4$ V
Absolute maximum input	15 V during 1.3 ms decaying pulse 5.5 V continuous
Response time	≤ 250 μ s from state 0 to state 1 ≤ 500 μ s from state 1 to state 0
Protection type	Input protection
Power dissipation	5 W
Isolation between group and bus	1780 Vrms for 1 minute
Isolation between group	500 Vrms for 1 minute
Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault detected (F) 32 LEDs green input status
Marking	CE

Bus current requirement	170 mA
Module format	Standard
Product weight	0.99 lb(US) (0.45 kg)

Environment

Standards	CSA C22.2 No 142 UL 508
Product certifications	GOST CUL FM Class 1 Division 2
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901013969
Nbr. of units in pkg.	1
Package weight(Lbs)	0.94000000000000006
Returnability	N
Country of origin	CN

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0844 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------


Racks for Modules Mounting

Dimensions of Modules and Racks

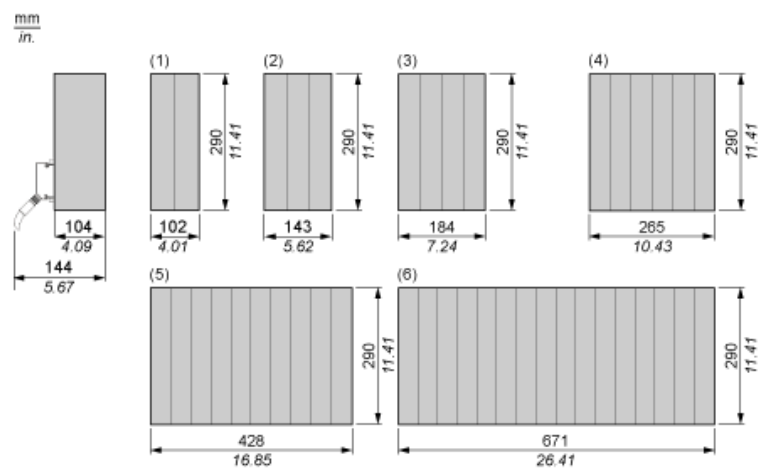

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Wiring Diagram

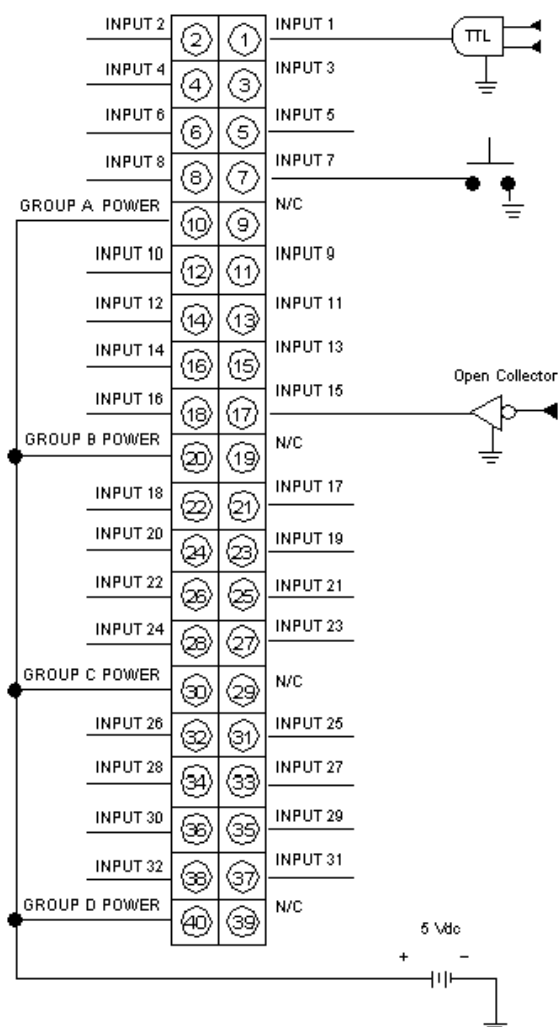

N/C Not Connected