




[Catalog Home](#)

Product Datasheet


ANDERSON FARGO

MS104N -- Suspension Clamp


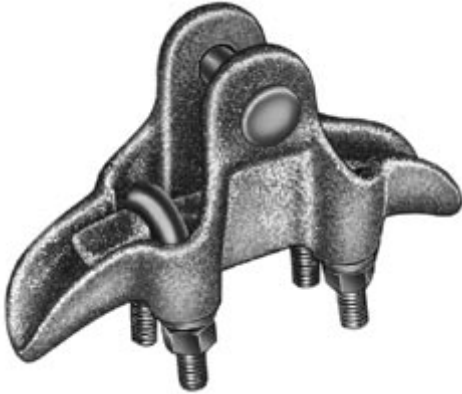


Suspension Clamp, Ductile Iron, for use with conductors 0.5 - 1.04 with fitting: None


Product Specifications

Series	 <p>MS series Ground Wire Suspension Ductile Iron</p>
PDF Catalog Page	Click HERE to view the web page.
Fitting	None
Clamp Material	Ductile Iron
Fitting Catalog No.	-
Ultimate Body Strength	25,000 lbs (11,340 kgs)
Maximum Take-off Angle 0	30
Dimension H	2.75 in (69.9 mm)
Dimension L	8.00 in (203.2 mm)
Dimension W	1.16 in (29.4 mm)
Hardware Material	Galvanized Steel
Minimum - Maximum Conductor Size	Alumoweld 19 # 10 Thru Alumoweld 7 # 5 w/Armor Rods EHS 9/16 inch str (7) Thru EHS 1/2 inch str (19) w/Armor Rods
Clamping Range	0.50 - 1.04 in (12.70 - 26.42 mm)
Material Type	Non-Standard
UPC Code	09635932216
Standard Package	10
Standard Package Unit	Each
Min Order Qty	1
Weight / Ea.	5.586 lbs

Compressed Product Number

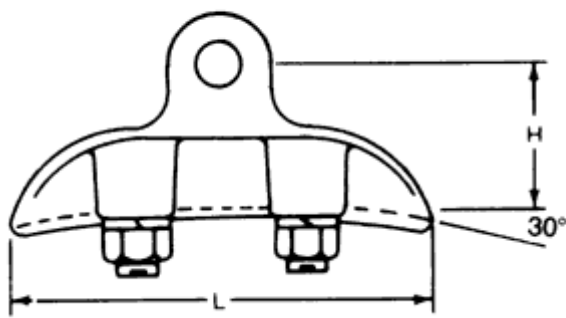

1/2" (U-BOLT DIAMETER)

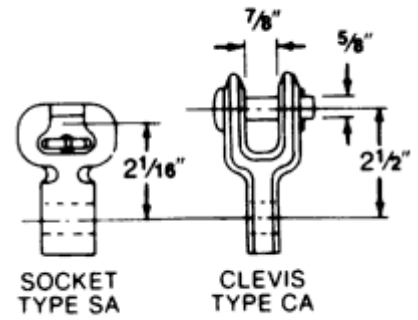

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.