




[Catalog Home](#)

Product Datasheet

CHANCE

M2TA -- Type T (ANSI) Cutout Fuselink

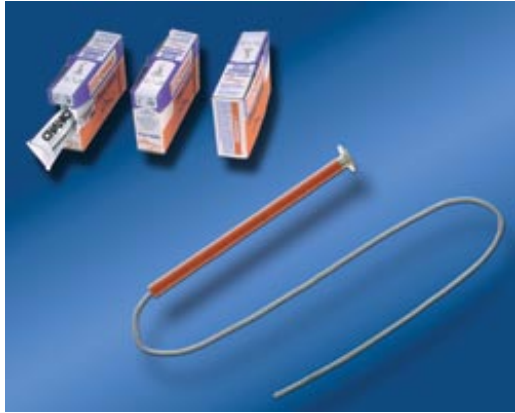

2 amp, Type T (ANSI) Cutout fuselink with a 26" (660.4mm) pigtail and a removable buttonhead.

Product Specifications

Type	Fuselinks
Fuselinks	Type T (ANSI)
Amp Rating	2
Removable Buttonhead	Yes
Pigtail Length	26" (660.4mm)
PDF Catalog Page	Click HERE to view detailed PDF Catalog
Fuse Link Application Guide and Time-Current Curves	Click HERE and request, Fuse Links (Bulletin 10-7701).
Fuse Element	Stainless-steel fuse/strain wire
Required Cutout Fuseholder	100 Amp (Do not use in a 200 amp fuseholder.)
Material Type	Non-Standard
UPC Code	09635904431
Standard Package	10
Standard Package Unit	Each
Min Order Qty	10
Pallet Quantity	4800
Weight / Ea.	0.078 lbs

Compressed Product Number

M2TA

[Catalog Home](#)



POWER SYSTEMS, INC.

[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.