


# SO1020M100S All-In-One Combination Service Entrance Device

## Features:

- Available with 100 ampere factory-installed main breaker
- Ring-type meter socket
- Overhead feed
- Adds up to 20 circuits of distribution to an existing home's electrical service
- Designed to accept SURGEBREAKER™ Secondary Surge Arrester for protection against surges up to 20,000 volts
- Compact design for easy installation
- Exclusive QWIK-OPEN® feature on 15A and 20A circuit breakers

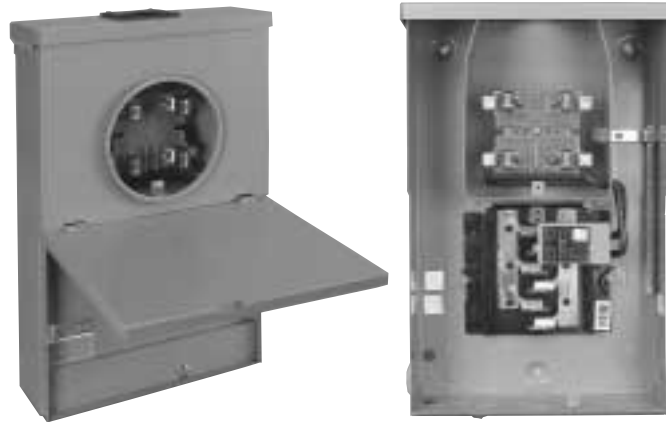

## Ideal for Residential Retrofit Applications

The SO1020M100S All-In-One provides 100A meter main service with space for 10 to 20 circuits. It is ideal for residential applications that require overhead service entrance and includes ring-style meter socket covers and a surface mount enclosure. Applications also include pole-mount, remote tenant metering and temporary power.

Square D CSED products meet more applications and local code requirements than any other brand – demonstrating once again that *no one in the world does more with electricity.*

## Ring Type All-In-One Surface Mount

Ampere Rating	By-Pass Type	Service	RMS Short Circuit Current Rating	Catalog Number	Main Circuit Breaker Type	Ampere Rating (Max.)	Branch Spaces
100	None	OH	10K	SO1020M100S	HOM2100	100	10

Max No. 1-Pole Circuits	Max No. Tandem Breakers	Branch C/B Amp. Rating (Max.)	Hub Type Order Sep.	Line Side Phase and Neutral Lugs (AWG/Kcmil)	Service Ground Lug (AWG/Kcmil)	Weight Each Lbs.	Pallet Qty.
20	10	80A	A	#6-1/0 CU/AL	#14-2/0 CU/AL	20	42



Schneider Electric Brands




**SQUARE D**  
Schneider Electric

# SO2040M200S All-In-One Combination Service Entrance Device

## Features:

- Available with 200 ampere factory-installed main breaker
- Modifiable QOM2-VH main breaker to 100, 125 or 150A alternate trip breakers
- Ring-type meter socket
- Overhead feed
- Accepts our Standby Generator Kit that provides switching between the main breaker and the generator breaker
- 22,000 UL Listed short circuit current rating with UL Listed series ratings
- Adds up to 40 circuits of distribution to an existing home's electrical service
- Designed to accept SURGEBREAKER™ Secondary Surge Arrester for protection against surges up to 20,000 volts
- Compact design for easy installation
- Exclusive QWIK-OPEN® feature on 15A and 20A circuit breakers

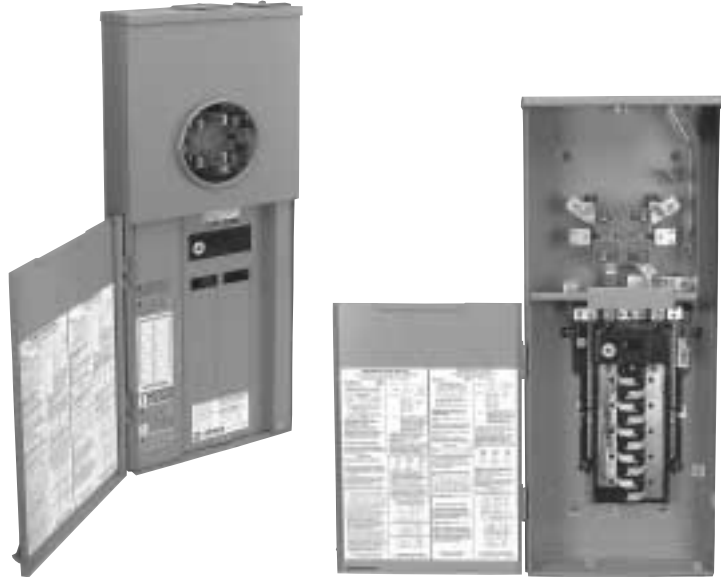

The SO2040M200S has provisions to accept our Standby Generator Kit, which provides easy switching between the main breaker and the generator-fed breaker.

## Ideal for Residential Retrofit Applications and New Construction

The SO2040M200S All-In-One provides 200A meter main service with space for 20 to 40 circuits. It is ideal for residential applications that require overhead service entrance and includes ring-style meter socket covers and a surface mount enclosure. Applications also include pole-mount, remote tenant metering and temporary power.


Square D CSED products meet more applications and local code requirements than any other brand – demonstrating once again that *no one does more with electricity.*

## Ring Type All-In-One Surface Mount

Ampere Rating	By-Pass Type	Service	RMS Short Circuit Current Rating	Catalog Number	Main Circuit Breaker Type	Ampere Rating (Max.)	Branch Spaces
200	None	OH	22K	SO2040M200S	QOM2200VH	200	20

Max No. 1-Pole Circuits	Max No. Tandem Breakers	Branch C/B Amp. Rating (Max.)	Hub Type Order Sep.	Line Side Phase and Neutral Lugs (AWG/Kcmil)	Service Ground Lug (AWG/Kcmil)	Weight Each Lbs.	Pallet Qty.
40	20	100	A	#6-350	#8-2/0	43	21



Square D,  and QWIK-OPEN are registered trademarks, and SURGEBREAKER is a trademark, of Square D Company or related companies.

© 1999 Square D Company All Rights Reserved



Order Number 4119HO9901