



# PL-L Long 4-Pin Base

## PL-L 24W/841/4P

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

## Product data

General Information		
Cap-Base	2G11 [ 2G11]	
Life to 50% Failures (Nom)	15000 h	
Life to 50% Fallures Preheat (Nom)	20000 h	
ight Technical		
Color Code	841 [ CCT of 4100K (841)]	
nitial lumen (Nom)	1800 lm	
Color Designation	Cool White (CW)	
umen Maintenance 10000 h (Nom)	92 %	
umen Maintenance 2000 h (Nom)	94 %	
umen Maintenance 5000 h (Nom)	93 %	
orrelated Color Temperature (Nom)	4100 K	
uminous Efficacy (rated) (Nom)	75 lm/W	
Color Rendering Index (Nom)	82	
Operating and Electrical		
Power (Rated) (Nom)	24.0 W	
amp Current (Nom)	0.345 A	
Voltage (Nom)	87 V	

Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Bulb Finish	Silicon	
Cap-Base Information	4P	
Product Data		
Order product name	PL-L 24W/841/4P	
EAN/UPC - Product	046677345082	
Order code	345082	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	25	
Material Nr. (12NC)	927903308421	
Net Weight (Piece)	82.000 g	
ILCOS Code	FSD-24/40/1B-E-2G11	


Datasheet, 2018, July 23 data subject to change

# PL-L Long 4-Pin Base

## Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


## **Dimensional drawing**




Product	D (max)	D1 (max)	C (max)
PL-L 24W/841/4P	39.0 mm	18.0 mm	321.6 mm

PL-L 24W/840/4P Silicon

#### Photometric data

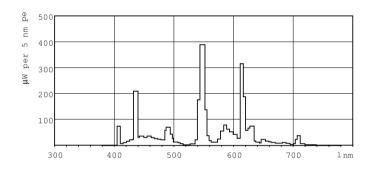

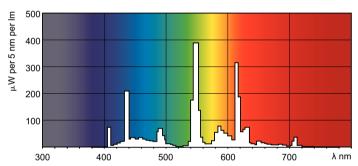

Lightcolor /840

Lightcolor /840

