





UPC Code: 07847778149
Country Of Origin: Mexico

3032-PLR

Brand Features

Leviton's Industrial Grade AC toggle switches for extra heavy-duty applications represent top-of-the-line quality and peak performance. Leviton uses the finest materials available and the highest production standards to produce industrial switches of unmatched versatility and reliability.

Item Description

30 Amp, 120 Volt, Toggle Pilot Light - Illuminated ON, Double-Pole AC Quiet Switch, Extra Heavy Duty Spec Grade, Self Grounding, Back &Side Wired, - Red

Technical Information

AC Horsepower Ratings
HP Rating: 2HP-120V
Max. Amperage: 24 Amp
Electrical Specifications
Amperage: 30 A

Voltage: 120 VAC

Grounding: Self-Grounding

Dielectric Voltage: Withstands 1500V

for 1 minute

Overload UL20 Test: 100 cycles of OL

at 4.8 times rated current

Temperature Rise: Maximum 30

degrees C rise

Endurance: 50,000 cycles minimum

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 65°C

Material Specifications

Strap Material: Steel

Base Material: Thermoplastic

Toggle: Polycarbonate

Cover Material: Thermoplastic Contact Material: Silver Alloy Terminal Screws: Brass 8-32 Grounding Screw: Brass 8-32

Ground Clips: Brass

Color: Red

Mechanical Specifications

Terminal ID: Brass-Hot Black-Hot White-Neutral Green-Gnd

Terminal Accom.: 14-#10 AWG back wired; #14-#12 AWG side wired Product ID: Ratings are permanently

marked on device

Torque Range: 12-14 inch pounds **Termination:** Back or Side Wire

Product Features
Color: Red

Grounding: Self-Grounding

Feature: Pilot Light - Illuminated ON -

Req. Neutral

Actuator Material: Polycarbonate **Body Material:** Thermoplastic

Strap Material: Steel Function: Double-Pole

Grade: Extra Heavy-Duty Industrial

Specification Grade

Feature 2: Illuminated - Load ON (Pilot

_ight)

Device Type: Toggle Switch Standards and Certifications **NEMA:** WD-1 & WD-6

ANSI: C-73


UL Fed Spec WS896E: File #E7458

UL Standard: UL 20


CSA C22.2 No. 111: File #152105

NOM: 057 RoHS: Compliant

Warranty: 10 Year Limited

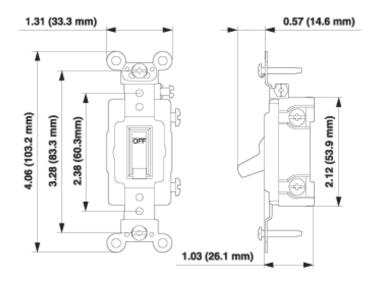

Wiring Diagram Double-Pole Pilot



SPECIFICATION SUBMITTAL

	OF EGILLOWING GODINITIVE	
I	JOB NAME:	CATALOG NUMBERS:
ı		
ı	JOB NUMBER:	

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

 $\label{eq:temperature} \textbf{Teléfono: +1-800-323-8920} \cdot \textbf{FAX: +1-800-832-9538} \cdot \textbf{Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005}$

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

