



[Catalog Home](#)

Product Datasheet


ANDERSON FARGO

HLS102P -- Compression Stirrup



Aluminum Overhead Compression Stirrup

Product Specifications

<p>Series</p>	 <p>HLS Series Overhead Stirrup Bronze, Compression Heavy Duty</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>Plating</p>	<p>None</p>
<p>Copper Loop Size</p>	<p>.258 in (6.54 mm)</p>
<p>Copper Loop Plating</p>	<p>Tin Plated</p>
<p>Packaging</p>	<p>Inhibitor & Bagged</p>
<p>Body and Keeper Material</p>	<p>Aluminum Alloy</p>
<p>Body Casting Material</p>	<p>Aluminum Alloy</p>
<p>Stirrup Material</p>	<p>Pure Copper</p>
<p>Stirrup Nominal Wire Size</p>	<p>#2 Solid</p>
<p>VERSA-Crimp ® Tool Type</p>	<p>"O" die</p>
<p>Dimension B</p>	<p>4.00" in (102 mm)</p>
<p>Dimension H</p>	<p>3.25 in (80 mm)</p>
<p>Main Contact Width</p>	<p>4.00" (102 mm)</p>
<p>Minimum / Maximum Run Conductor</p>	<p>AAC 1/0 str (7) Thru AAC 1/0 str (19) AAAC 1/0 str(7)^ACSR 1 (6/1) Thru ACSR 1/0 (6/1)</p>
<p>Minimum Run Conductor Size</p>	<p>0.355</p>
<p>Maximum Run Conductor Size</p>	<p>0.398</p>
<p>Material Type</p>	<p>Non-Standard</p>
<p>UPC Code</p>	<p>09635931640</p>
<p>Standard Package</p>	<p>50</p>
<p>Standard Package Unit</p>	<p>Each</p>
<p>Min Order Qty</p>	<p>50</p>
<p>Weight / Ea.</p>	<p>0.49 lbs</p>

Notes


For use on aluminum or copper lines.

Features

Protects primary lines from arcing damage. Wide stance gives good stability for installing hotline clamp.

Compressed Product Number

HLS102P

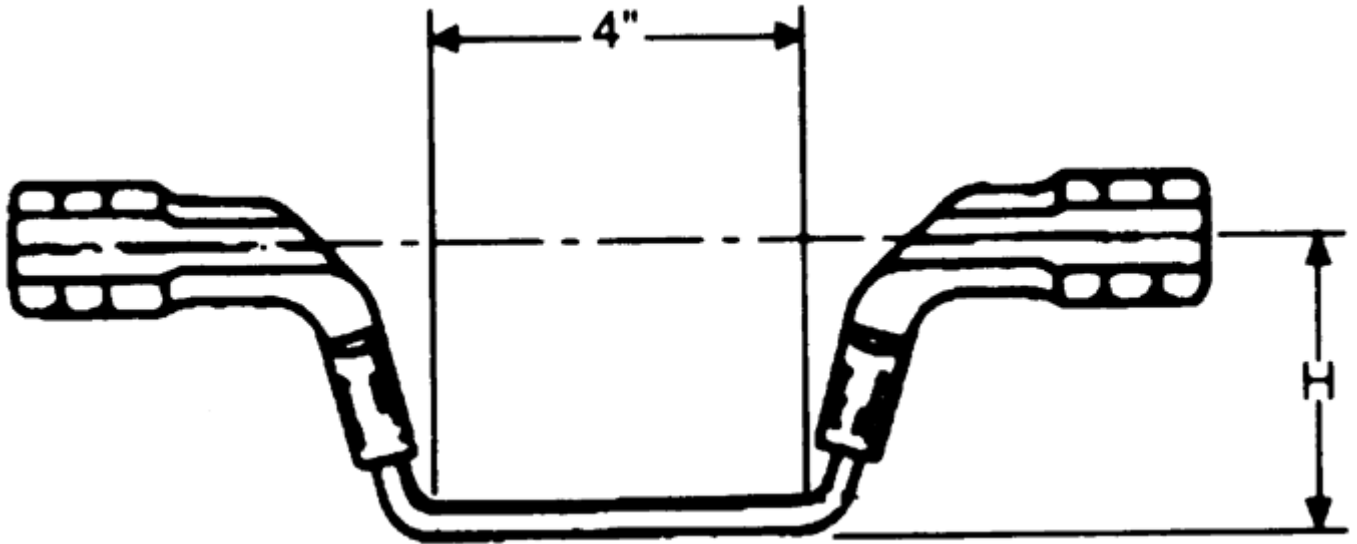

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.