

## General Accessories


### Back Panels



#### Back Panels

| CATALOG SUFFIX | MATERIAL        | GRADE     | FINISH               | MISC.   |
|----------------|-----------------|-----------|----------------------|---------|
| AL             | Aluminum        | 3003 H14  | None                 |         |
| SS             | Stainless Steel | 304       | None                 |         |
| FG             | Fiberglass      |           |                      | UL94-V0 |
| CS             | Carbon Steel    | 1008/1010 | Painted White Enamel |         |

Note: Available for all product families unless otherwise specified

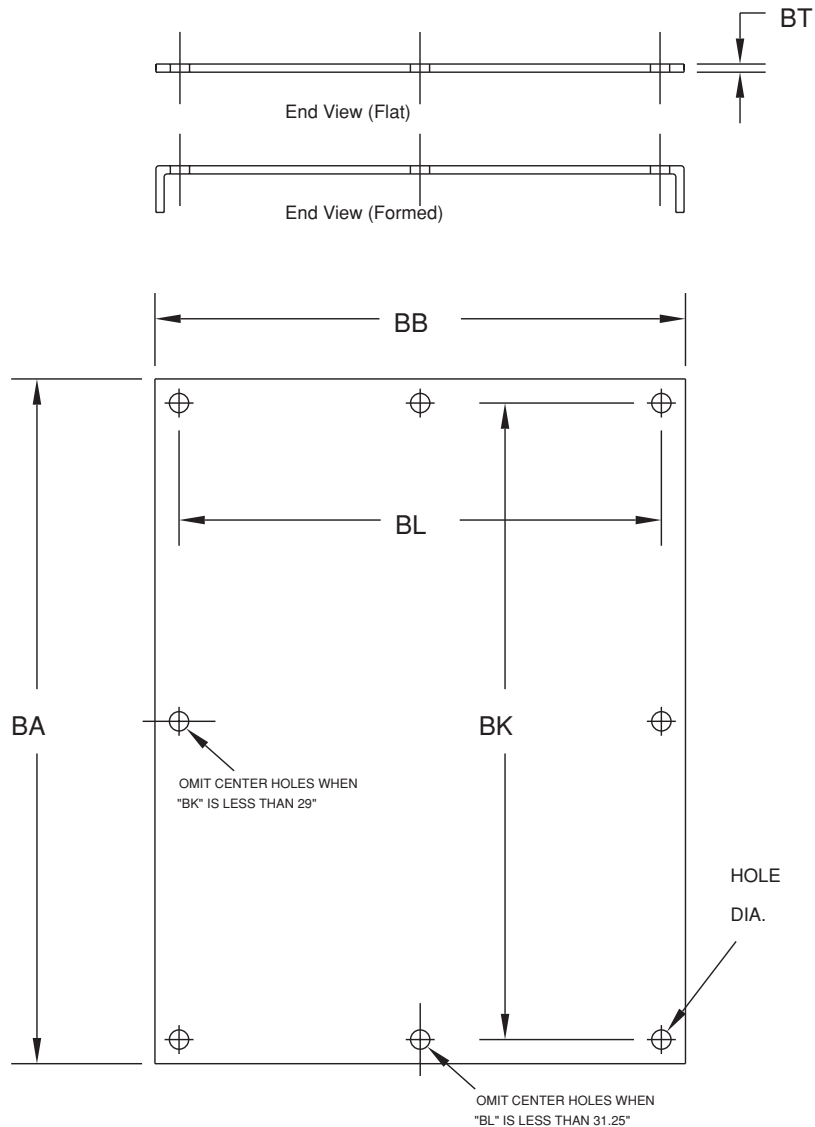

## Enclosure Specific Accessories

### Typical Series Designators: DS, J, JCC, RJ, CL, PC, F Back Panel Dimensions

| SIZE ID NUMBER | BA             | BB             | BK             | BL             | BT (AL)     | BT (FG)     | BT (SS)     | BT (CS)     | PANEL TYPE | HOLE DIA.  | # OF HOLES | Weight (Aluminum)<br>Suffix: AL | Weight (Fiberglass)<br>Suffix: FG | Weight (Stainless)<br>Suffix: SS | Weight (Carbon Steel)<br>Suffix: CS |
|----------------|----------------|----------------|----------------|----------------|-------------|-------------|-------------|-------------|------------|------------|------------|---------------------------------|-----------------------------------|----------------------------------|-------------------------------------|
| BP64           | 4.88<br>(124)  | 2.88<br>(73)   | 4.25<br>(108)  | 2.25<br>(57)   | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 2 oz.                           | 2 oz.                             | 5 oz.                            | 6 oz.                               |
| BP66           | 4.88<br>(124)  | 4.88<br>(124)  | 4.25<br>(108)  | 4.25<br>(108)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 3 oz.                           | 3 oz.                             | 6 oz.                            | 8 oz.                               |
| BP76           | 6<br>(152)     | 4.88<br>(124)  | 5.38<br>(137)  | 4.25<br>(108)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 4 oz.                           | 4 oz.                             | 9 oz.                            | 10 oz.                              |
| BP86           | 6.88<br>(175)  | 4.88<br>(124)  | 6.25<br>(159)  | 4.25<br>(108)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 4 oz.                           | 4 oz.                             | 12 oz.                           | 12 oz.                              |
| BP88           | 6.88<br>(175)  | 6.88<br>(175)  | 6.25<br>(159)  | 6.25<br>(159)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 5 oz.                           | 5 oz.                             | 15 oz.                           | 15 oz.                              |
| BP96           | 8.25<br>(210)  | 4.88<br>(124)  | 7.63<br>(194)  | 4.25<br>(108)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 5 oz.                           | 5 oz.                             | 12 oz.                           | 14 oz.                              |
| BP108          | 8.88<br>(225)  | 6.88<br>(175)  | 8.25<br>(210)  | 6.25<br>(159)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 8 oz.                           | 8 oz.                             | 1.2 lb.                          | 1.3 lb.                             |
| BP1210         | 10.88<br>(276) | 8.88<br>(225)  | 10.25<br>(260) | 8.25<br>(210)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 12 oz.                          | 14 oz.                            | 1.9 lb.                          | 2.1 lb.                             |
| BP1212         | 10.88<br>(276) | 10.88<br>(276) | 10.25<br>(260) | 10.25<br>(260) | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 1 lb.                           | 1.1 lb.                           | 2.3 lb.                          | 2.4 lb.                             |
| BP1407         | 12.88<br>(327) | 5.88<br>(149)  | 12.25<br>(311) | 5.25<br>(133)  | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 14 oz.                          | 14 oz.                            | 2 lb.                            | 2.1 lb.                             |
| BP1412         | 12.88<br>(327) | 10.88<br>(276) | 12.25<br>(311) | 10.25<br>(260) | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 1.125 lb.                       | 1.3 lb.                           | 2.8 lb.                          | 3 lb.                               |
| BP1614         | 14.88<br>(378) | 12.88<br>(327) | 14.25<br>(362) | 12.25<br>(311) | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 1.5 lb.                         | 1.4 lb.                           | 3.8 lb.                          | 4.1 lb.                             |
| BP1816         | 16.88<br>(429) | 14.88<br>(378) | 16.25<br>(413) | 14.25<br>(362) | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 1.94 lb.                        | 2 lb.                             | 5.5 lb.                          | 5.4 lb.                             |
| BPJ2016        | 18.88<br>(479) | 14.88<br>(378) | 18.25<br>(463) | 14.25<br>(362) | .080<br>(2) | .125<br>(3) | .060<br>(2) | .075<br>(2) | Flat       | .25<br>(6) | 4          | 2.25 lb.                        | 2.1 lb.                           | 6.1 lb.                          | 6.1 lb.                             |

Caution: Metric units are for reference do not convert.

Note: When specifying combine Size ID Number and Material Suffix

Example: BP64SS for 6x4 Stainless Steel Back Panel

### Typical Series Designators: C - Disconnect Back Panel Dimensions

| SIZE ID NUMBER | BA             | BB             | BK             | BL             | Panel Thickness<br>BT | Panel Type | Hole Dia.    | # of Holes | Weight (Steel)<br>(suffix: CS) | Fits Typical Enclosure Size  |
|----------------|----------------|----------------|----------------|----------------|-----------------------|------------|--------------|------------|--------------------------------|------------------------------|
| BP2016CD       | 16.88<br>(429) | 13.38<br>(340) | 15.25<br>(387) | 11.25<br>(286) | 0.13<br>(2)           | Formed     | 0.31<br>(8)  | 4          | 7.3 lbs.                       | 20 x 16 Disconnect Enclosure |
| BP2412CD       | 20.88<br>(530) | 9.38<br>(238)  | 19.25<br>(489) | 7.25<br>(184)  | 0.13<br>(2)           | Formed     | 0.50<br>(13) | 4          | 6.5 lbs.                       | 24 x 12 Disconnect Enclosure |
| BP2424CD       | 20.88<br>(530) | 21.38<br>(543) | 19.25<br>(489) | 19.25<br>(489) | 0.13<br>(2)           | Formed     | 0.50<br>(13) | 4          | 14 lbs.                        | 24 x 24 Disconnect Enclosure |
| BP3024CD       | 26.88<br>(683) | 21.38<br>(543) | 25.25<br>(641) | 19.25<br>(489) | 0.13<br>(2)           | Formed     | 0.50<br>(13) | 4          | 19 lbs.                        | 30 x 24 Disconnect Enclosure |
| BP3630CD       | 32.88<br>(835) | 27.38<br>(695) | 31.25<br>(794) | 25.25<br>(641) | 0.13<br>(2)           | Formed     | 0.50<br>(13) | 6          | 29 lbs.                        | 36 x 30 Disconnect Enclosure |

Caution: Metric units are for reference do not convert.

Note: Carbon Steel (CS) available only

## Enclosure Specific Accessories

### Typical Series Designation: N Series Back Panel Dimensions

| SIZE ID NUMBER | BA              | BB             | BK              | BL             | BT (AL)     | BT (SS)     | BT (CS)     | PANEL TYPE | HOLE DIA.   | # OF HOLES | Weight (Aluminum)<br>Suffix: AL | Weight (Stainless)<br>Suffix: SS | Weight (Carbon Steel)<br>Suffix: CS |
|----------------|-----------------|----------------|-----------------|----------------|-------------|-------------|-------------|------------|-------------|------------|---------------------------------|----------------------------------|-------------------------------------|
| BP1610         | 13.00<br>(330)  | 8.50<br>(216)  | 12.00<br>(305)  | 7.50<br>(191)  | .080<br>(2) | .060<br>(2) | .105<br>(3) | Flat       | 0.31<br>(8) | 4          | 1 lb                            | 1.5 lbs                          | 3.3 lbs                             |
| BP2016         | 17.00<br>(432)  | 13.00<br>(330) | 15.25<br>(387)  | 11.25<br>(286) | .080<br>(2) | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 2 lbs                           | 3.7 lbs                          | 6.7 lbs                             |
| BP2020         | 17.00<br>(432)  | 17.00<br>(432) | 15.25<br>(387)  | 15.25<br>(387) | .080<br>(2) | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 2.5 lbs                         | 4 lbs                            | 5.7 lbs                             |
| BP2412         | 21.00<br>(533)  | 9.00<br>(229)  | 19.25<br>(489)  | 7.25<br>(184)  | .080<br>(2) | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 1.5 lbs                         | 5 lbs                            | 8.7 lbs                             |
| BP2420         | 21.00<br>(533)  | 17.00<br>(432) | 19.25<br>(489)  | 15.25<br>(387) | .13<br>(3)  | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 4.5 lbs                         | 6 lbs                            | 10.8 lbs                            |
| BP2424         | 21.00<br>(533)  | 21.00<br>(533) | 19.25<br>(489)  | 19.25<br>(489) | .13<br>(3)  | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 5.5 lbs                         | 7.4 lbs                          | 13.4 lbs                            |
| BP3020         | 27.00<br>(686)  | 17.00<br>(432) | 25.25<br>(641)  | 15.25<br>(387) | .13<br>(3)  | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 5.8 lbs                         | 7.7 lbs                          | 14 lbs                              |
| BP3024         | 27.00<br>(686)  | 21.00<br>(533) | 25.25<br>(641)  | 19.25<br>(489) | .13<br>(3)  | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 7 lbs                           | 9.6 lbs                          | 17 lbs                              |
| BP3630         | 33.00<br>(838)  | 27.00<br>(686) | 31.25<br>(794)  | 25.25<br>(641) | .13<br>(3)  | .060<br>(2) | .105<br>(3) | Flat       | .50<br>(13) | 4          | 11 lbs                          | 15.2 lbs                         | 27 lbs                              |
| BP3636         | 31.00<br>(787)  | 33.00<br>(838) | 29.00<br>(737)  | 31.00<br>(787) | .13<br>(3)  | .060<br>(2) | .105<br>(3) | Formed     | .50<br>(13) | 6          | 14 lbs                          | 18.5 lbs                         | 33 lbs                              |
| BP4836         | 45.00<br>(1143) | 33.00<br>(838) | 43.25<br>(1099) | 31.25<br>(794) | .13<br>(3)  | .060<br>(2) | .105<br>(3) | Formed     | .50<br>(13) | 8          | 20 lbs                          | N/A                              | 47 lbs                              |
| BP6036         | 57.00<br>(1448) | 33.00<br>(838) | 55.25<br>(1403) | 31.25<br>(794) | .13<br>(3)  | .105<br>(3) | .105<br>(3) | Formed     | .50<br>(13) | 8          | 25 lbs                          | N/A                              | 60 lbs                              |
| BP7225         | 64.00<br>(1626) | 21.00<br>(533) | 62.00<br>(1575) | 19.00<br>(483) | .13<br>(3)  | .105<br>(3) | .105<br>(3) | Formed     | .50<br>(13) | 10         | 18.5 lbs                        | N/A                              | 43 lbs                              |
| * BP7249       | 64.00<br>(1626) | 22.00<br>(559) | 62.00<br>(1575) | 20.00<br>(508) | .13<br>(3)  | .105<br>(3) | .105<br>(3) | Formed     | .50<br>(13) | 10         | 38 lbs                          | N/A                              | 86 lbs                              |
| * BP7260       | 64.00<br>(1626) | 27.50<br>(698) | 62.00<br>(1575) | 25.50<br>(648) | .13<br>(3)  | .105<br>(3) | .105<br>(3) | Formed     | .50<br>(13) | 10         | 46 lbs                          | N/A                              | 109 lbs                             |

\* Set of two panels.

Caution: Metric units are for reference; do not convert.

Note: When specifying combine Size ID Number and Material Suffix

Example: BP1610CS for 16x10 Carbon Steel Back Panel

## Enclosure Specific Accessories – Control Series Back Panels

### Typical Series Designation: N Series Back Panel Dimensions

| SIZE ID NUMBER | BA              | BB             | BK              | BL             | BT (AL)      | BT (FG)     | BT (SS)      | BT (CS)      | PANEL TYPE | HOLE DIA.     | # OF HOLES | Weight (Aluminum)<br>Suffix: AL | Weight (Stainless)<br>Suffix: SS | Weight (Carbon Steel)<br>Suffix: CS |
|----------------|-----------------|----------------|-----------------|----------------|--------------|-------------|--------------|--------------|------------|---------------|------------|---------------------------------|----------------------------------|-------------------------------------|
| BP3648*        | 31.00<br>(787)  | 22.00<br>(559) | 29.00<br>(737)  | 20.00<br>(508) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Flat       | 0.500<br>(13) | 8          | 1 lb.                           | N/A                              | 3.3 lbs.                            |
| BP5442*        | 49.00<br>(1245) | 19.00<br>(483) | 47.00<br>(1194) | 17.00<br>(432) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 6          | 2 lbs.                          | N/A                              | 6.7 lbs.                            |
| BP6024         | 57.00<br>(1448) | 21.00<br>(533) | 55.25<br>(1403) | 19.25<br>(489) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 6          | 2.5 lbs.                        | N/A                              | 5.7 lbs.                            |
| BP6048*        | 52.50<br>(1334) | 21.5<br>(546)  | 50.50<br>(1283) | 19.50<br>(495) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 1.5 lbs.                        | N/A                              | 8.7 lbs.                            |
| BP6060*        | 52.50<br>(1334) | 27.50<br>(699) | 50.50<br>(1283) | 25.50<br>(648) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 4.5 lbs.                        | N/A                              | 10.8 lbs.                           |
| BP6248*        | 54.50<br>(1384) | 21.50<br>(546) | 52.50<br>(1334) | 19.50<br>(495) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 5.5 lbs.                        | N/A                              | 13.4 lbs.                           |
| BP6260*        | 54.50<br>(1384) | 27.50<br>(699) | 52.50<br>(1334) | 25.50<br>(648) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 5.8 lbs.                        | N/A                              | 14 lbs.                             |
| BP7224         | 64.00<br>(1626) | 20.00<br>(508) | 62.00<br>(1575) | 18.00<br>(457) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 7 lbs.                          | N/A                              | 17 lbs.                             |
| BP7230         | 64.00<br>(1626) | 26.00<br>(660) | 62.00<br>(1575) | 24.00<br>(610) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 11 lbs.                         | N/A                              | 27 lbs.                             |
| BP7231         | 64.00<br>(1626) | 27.00<br>(686) | 62.00<br>(1575) | 25.00<br>(635) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.438<br>(11) | 10         | 14 lbs.                         | N/A                              | N/A                                 |
| BP7236         | 64.00<br>(1626) | 32.00<br>(813) | 62.00<br>(1575) | 30.00<br>(762) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 20 lbs.                         | N/A                              | 47 lbs.                             |
| BP7237         | 64.00<br>(1626) | 33.00<br>(838) | 62.00<br>(1575) | 31.00<br>(787) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 25 lbs.                         | N/A                              | 60 lbs.                             |
| BP7248*        | 64.00<br>(1626) | 21.50<br>(546) | 62.00<br>(1575) | 19.50<br>(495) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 18.5 lbs.                       | N/A                              | 43 lbs.                             |
| BP7272*        | 64.00<br>(1626) | 33.50<br>(851) | 62.00<br>(1575) | 31.50<br>(800) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 38 lbs.                         | N/A                              | 128 lbs.                            |
| BP7460*        | 66.00<br>(1676) | 27.50<br>(699) | 64.00<br>(1626) | 25.50<br>(648) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 46 lbs.                         | N/A                              | 109 lbs.                            |
| BP7472*        | 66.00<br>(1676) | 33.50<br>(851) | 64.00<br>(1626) | 31.50<br>(800) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 60 lbs.                         | N/A                              | 132 lbs.                            |
| BP9024         | 82.00<br>(2083) | 20.00<br>(508) | 80.00<br>(2032) | 18.00<br>(457) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 23 lbs.                         | N/A                              | 49 lbs.                             |
| BP9036         | 82.00<br>(2083) | 32.00<br>(813) | 80.00<br>(2032) | 30.00<br>(762) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 36 lbs.                         | N/A                              | 79 lbs.                             |
| BP9048*        | 82.00<br>(2083) | 21.5<br>(546)  | 80.00<br>(2032) | 19.50<br>(495) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 48 lbs.                         | N/A                              | 105 lbs.                            |
| BP9072*        | 82.00<br>(2083) | 33.50<br>(851) | 80.00<br>(2032) | 31.50<br>(800) | 0.125<br>(3) | 0.25<br>(6) | 0.060<br>(2) | 0.105<br>(3) | Formed     | 0.563<br>(14) | 10         | 72 lbs.                         | N/A                              | 164 lbs.                            |


\* Set of two panels.

Caution: Metric units are for reference; do not convert.

Note: When specifying combine Size ID Number and Material Suffix

Example: BP1610CS for 16x10 Carbon Steel Back Panel


## Enclosure Specific Accessories – DuraBoxx Back Panels

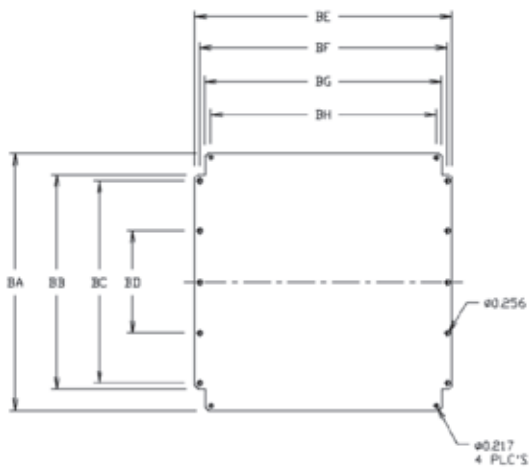

### DuraBoxx® D Series Back Panel Dimensions

| BACK PANEL MODEL NO. | BA             | BB             | BC             | BD            | BE             | BF             | BG             | BH             | # OF HOLES |
|----------------------|----------------|----------------|----------------|---------------|----------------|----------------|----------------|----------------|------------|
| D333BP               | 2.48<br>(63)   | 1.02<br>(26)   | N/A            | N/A           | 2.68<br>(68)   | 2.28<br>(58)   | 1.85<br>(47)   | N/A            | 2          |
| D342BP               | 2.44<br>(62)   | 1.26<br>(32)   | N/A            | N/A           | 3.82<br>(97)   | 3.50<br>(89)   | 3.27<br>(83)   | N/A            | 2          |
| D554BP               | 4.21<br>(107)  | 2.44<br>(62)   | 2.05<br>(52)   | N/A           | 4.29<br>(109)  | 3.74<br>(95)   | 3.39<br>(86)   | 2.83<br>(72)   | 6          |
| D594BP               | 4.21<br>(107)  | 2.44<br>(62)   | 2.05<br>(52)   | N/A           | 8.15<br>(207)  | 7.60<br>(193)  | 7.24<br>(184)  | 6.69<br>(170)  | 6          |
| D774BP               | 5.67<br>(144)  | 3.43<br>(87)   | 2.99<br>(76)   | N/A           | 5.67<br>(144)  | 5.20<br>(132)  | 4.61<br>(117)  | 4.02<br>(102)  | 6          |
| D7114BP              | 5.67<br>(144)  | 3.43<br>(87)   | 2.99<br>(76)   | N/A           | 9.61<br>(244)  | 9.13<br>(232)  | 8.54<br>(217)  | 7.95<br>(202)  | 6          |
| D10105BP             | 9.17<br>(233)  | 6.93<br>(176)  | 3.94<br>(100)  | N/A           | 9.37<br>(238)  | 8.94<br>(227)  | 8.31<br>(211)  | 7.72<br>(196)  | 6          |
| D10165BP             | 9.17<br>(233)  | 6.93<br>(176)  | 3.94<br>(100)  | N/A           | 15.08<br>(383) | 14.65<br>(372) | 14.02<br>(356) | 13.43<br>(341) | 6          |
| D14144BP             | 13.54<br>(344) | 11.30<br>(287) | 10.63<br>(270) | 5.35<br>(136) | 13.54<br>(344) | 13.07<br>(332) | 12.48<br>(317) | 11.89<br>(302) | 10         |
| D16165BP             | 15.28<br>(388) | 13.03<br>(331) | 9.84<br>(250)  | N/A           | 15.04<br>(382) | 14.65<br>(372) | 13.98<br>(355) | 13.43<br>(341) | 6          |

Caution: Metric units are for reference; do not convert.

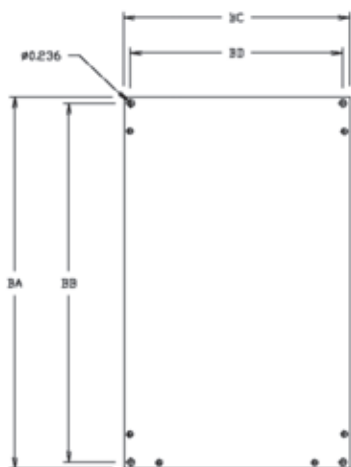

### DuraBoxx® DL Series Back Panel Dimensions

| BACK PANEL MODEL NO. | BA             | BB             | BC             | BD             | # OF HOLES |
|----------------------|----------------|----------------|----------------|----------------|------------|
| DL18127BP            | 13.94<br>(354) | 13.46<br>(342) | 8.46<br>(215)  | 7.95<br>(202)  | 4          |
| DL18168BP            | 14.80<br>(376) | 14.25<br>(362) | 12.83<br>(326) | 12.24<br>(311) | 4          |
| DL24168BP            | 21.89<br>(556) | 21.34<br>(542) | 14.84<br>(377) | 14.21<br>(361) | 4          |

Caution: Metric units are for reference; do not convert.