

## Messenger and Lashing Ties and Straps

An absolute in chemical environments — and it floats!


### Weather-Resistant Polypropylene Lashing Ties with Releasable Heads

- Excellent chemical resistance
- Buoyant — will float on most surfaces
- Made of black weather-resistant polypropylene for outdoor use
- Locking heads made of UV-resistant nylon
- For use in temperatures ranging from -40° F to 176° F (-40° C to 80° C)



STD. PKG. CAT. NO.	BODY WIDTH IN./MM	LENGTH IN./MM	MAX. WIRE BUNDLE DIA. IN./MM	TENSILE STRENGTH LBS./N	STD. PKG. QTY.
<b>Weather-Resistant Polypropylene Lashing Tie (Releasable)</b>					
TY5418PX	.5/12.7	18/457.2	5/127.0	150/667.2	25
TY5424PX	.5/12.7	24/609.6	7/177.8	150/667.2	25
TY5442PX	.5/12.7	42/1066.8	12/304.8	150/667.2	10
TY5460PX	.5/12.7	60/1524	18/457.2	150/667.2	10
<b>Weather-Resistant Polypropylene Hanger Lashing Tie (Releasable)</b>					
TY53418PX	.5/12.7	18/457.2		5	25

### Weather-Resistant Polypropylene Strapping and Accessories

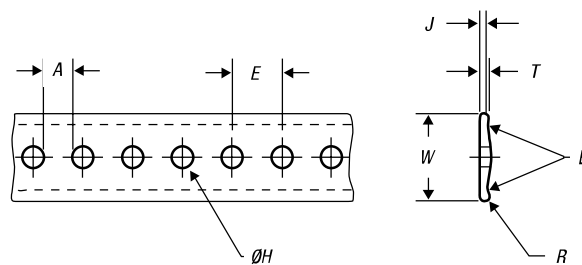

STRAPPING CAT. NO.	MATERIAL	DIMENSIONS (IN.)								STRAP-TITE BUCKLE	MOUNTING TAB	MACHINE SCREW
		A	B	E	H	J	R	T	W			
S2NY-096-0-C	Black Nylon	.091 ± .010	.189	.187	.096 ± .003	.023 ± .003	.016	.031 ± .003	.284 ± .012	—	—	#2
S4NY-167-0-C	Black Nylon	.145 ± .020	.189	.312	.167 ± .005	.033 ± .003	.022	.045 ± .003	.375 ± .010	—	—	#8
S6NY-203-0-C	Black Nylon	.187 ± .020	.189	.390	.203 ± .005	.045 ± .005	.030	.060 ± .005	.490 ± .015	B6NY-203-0-D	M6NY-265-0-D	#10