

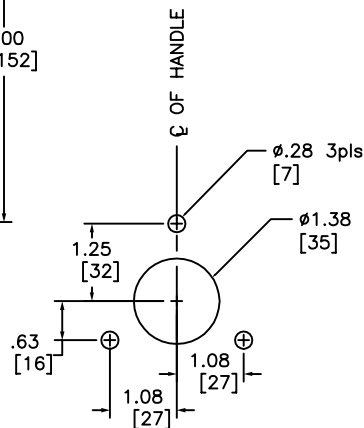


KIT	OPER. MECH.	HANDLE	SHAFT
LP1	LK1	LH6 (6")	LS8 (STD)
LP3	LK1	LF3 (3")	LS12 (LONG)
LP4	LK1	LF6 (6")	LS12 (LONG)

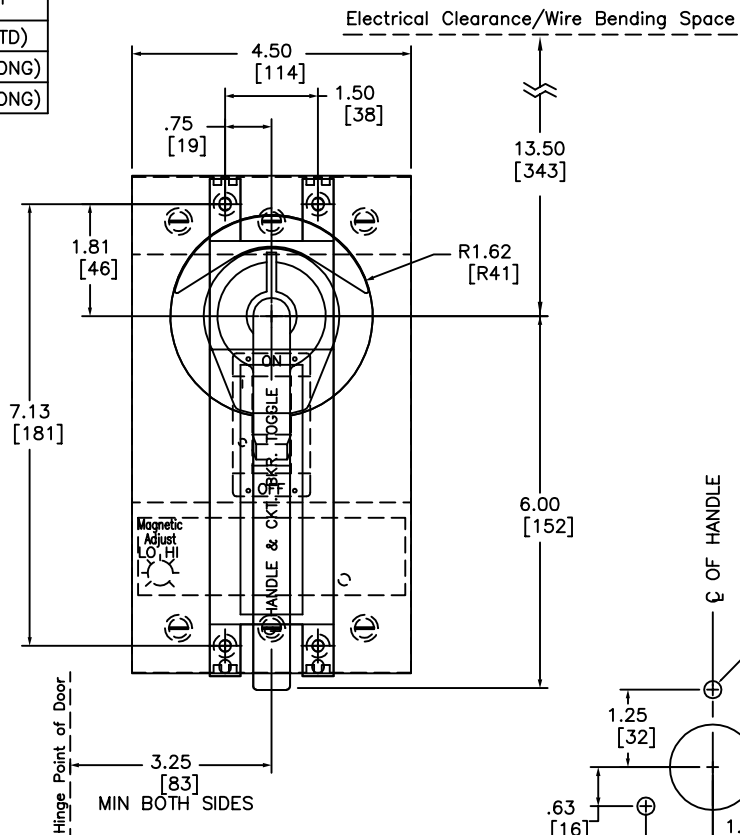

ENCLOSURE DOOR DRILLING

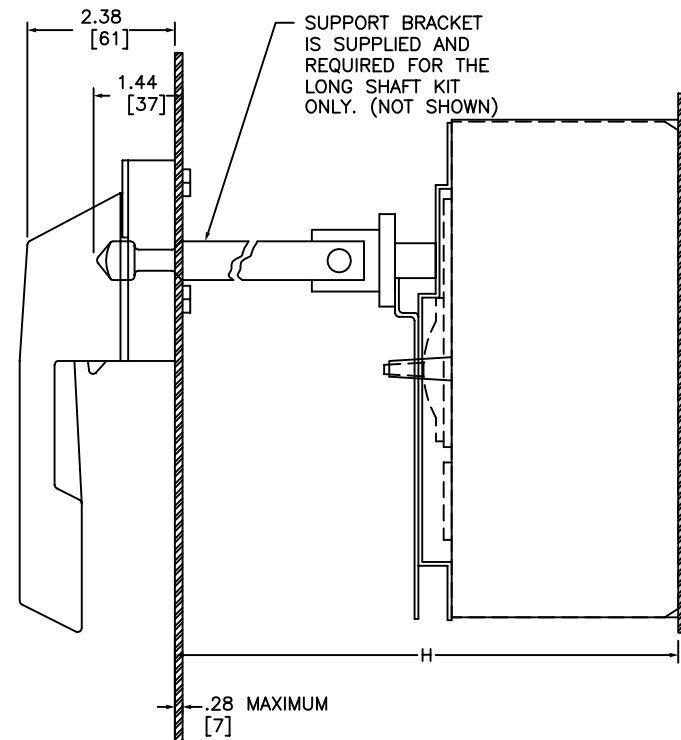

DOOR THICKNESS

H=Standard shaft		H=Long shaft	
MIN	MAX	MIN	MAX
6.25 [159]	11.19 [284]	6.25 [159]	21.75 [552]

SHAFT LENGTH FORMULA – $L = H - 3.63$
MOUNTING DEPTH (H) – measured from the
circuit breaker mounting surface to the outside
of the enclosure door.

Catalog Number: 9421-LP
 Ratings: (9421-LK1 MECHANISM) for use with TYPE KAL, KCL, OR KHL CIRCUIT BREAKERS
 UL File/Guide: EG2922
 CSA File/Guide: —
 Meets Standards: —
 Weight: LK1-1.36 lbs/LP1-3.98 lbs/LP3-4.00 lbs/LP4-5.75 lbs
 Wire Size: —
 Terminal torque: —
 Mounting Hwd.: (4)-#10-24 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY. USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE PROJECTION 

TOLERANCES
UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMALS $\pm .01$

LK1 MECH. FOR TYPE KAL, KCL, OR KHL
CIRCUIT BREAKERS
CLASS 9421 TYPE LP



SQUARE D COMPANY

DWG# 9421 LP_OUTLINE_001