


GLS-26

Ground Level Squeeze Tool

The GLS-26 is an upgrade to our field proven GLS-20 Emergency Tool by providing direct dial squeeze control. The new color coded gap stops, along with an emergency setting, enables you to safely squeeze off every PE pipe size from 1/2" CTS through 2" IPS — with all settings and pipe sizes cross-referenced on a frame-mounted color chart. Simply dial in the prescribed gap stop by rotating the stainless steel, color coded disc. A dual set of spring-action "whiskers" guide you in centering the jaws squarely on the pipe. Turning the tool's 12" handle generates up to 10,000lbs of squeeze force, while its upper-frame torque handle provides added leverage. Light and durable, the trim GLS-26 is designed with the same unparalleled 3:1 strength factor bred into the entire Mustang family. For further safety, we've attached a solid copper grounding device, with 5' strap and 3/8"x12" spike, as standard equipment.

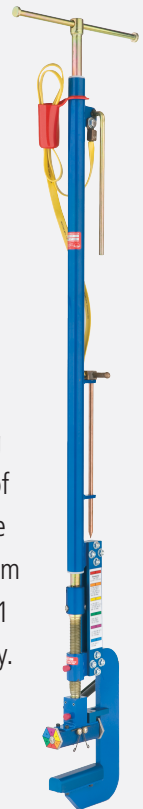

Weight: 19lbs
Dimensions: 59"x 6.5"
Capacity: See Table Below

Emergency Gap .000
 Any Size
 1/2" CTS – 2" IPS

1/2" IPS, DR-9.3
 1/2" CTS, DR-7
 1" CTS, DR-12.5
 3/4" CTS, DR-9.7
 .090-.095 Wall

3/4" IPS, DR-11
 1" CTS, DR-11/11.5
 1-1/4" CTS, DR-15
 .095-.101 Wall

1" IPS, DR-11
 1" CTS, DR-9
 .119-.121 Wall

1-1/4" IPS, DR-10/11
 1-1/2" IPS, DR-11
 .151-.173 Wall

2" IPS, DR-11
 .216 Wall

MUSTANG
 Squeeze Tools

2401 Lockheed Way
 Carson City, NV 89706

775.883.0732 Tel
 775.883.3372 Fax

mustangmfg@gbis.com
 www.squeezetool.com