


Price* : 110.00 USD



Main

Range of product	OsiSense XX
Sensor type	Ultrasonic sensor
Series name	General purpose
Sensor name	XX7
Sensor design	Flat form 18 x 33 x 60 + cylindrical M18
Detection system	Diffuse
[Sn] nominal sensing distance	1.64 ft (0.5 m) adjustable with remote teach push-button
Material	Plastic
Type of output signal	Discrete
Discrete output function	1 NO
Wiring technique	3-wire
Discrete output type	PNP
[Us] rated supply voltage	12...24 V DC with reverse polarity protection
Electrical connection	Male connector M12 4 pins
[Sd] sensing range	0.17...1.67 ft (0.051...0.508 m)
Beam angle	12 °
IP degree of protection	IP67 conforming to IEC 60529

Complementary

Enclosure material	Valox
Front material	Epoxy
Supply voltage limits	10...28 V DC
[Sa] assured operating distance	0.17...1.67 ft (0.051...0.508 m) (teach mode)
Maximum differential travel	0.1 in (2.5 mm)
Blind zone	0...2.01 in (0...51 mm)
Transmission frequency	300 kHz

Repeat accuracy	1.27 %
Minimum size of detected object	Cylinder diameter 2.5 mm 0.15 m Flat bar 1 mm wide 0.15 m
Status LED	1 LED (green) supply on 1 LED (yellow) output state
Current consumption	40 mA
Maximum switching current	100 mA
Voltage drop	< 1 V
Switching frequency	<= 40 Hz
Delay first up	100 ms
Delay response	10 ms
Delay recovery	10 ms
Marking	CE
Height	1.73 in (44 mm)
Width	0.71 in (18 mm)
Depth	2.36 in (60 mm)

Environment

Standards	IEC 60947-5-2
Ambient air temperature for operation	-4...149 °F (-20...65 °C)
Ambient air temperature for storage	-40...176 °F (-40...80 °C)
Vibration resistance	+/-1 mm conforming to IEC 60068-2-6 10...55 Hz
Shock resistance	30 gn in all 3 axes 11 ms conforming to IEC 60068-2-27
Resistance to electrostatic discharge	8 kV level 4 conforming to IEC 61000-4-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) level 3 conforming to IEC 61000-4-3
Resistance to fast transients	1 kV level 3 conforming to IEC 61000-4-4

Ordering and shipping details

Category	22490 - SENSORS-ULTRASONIC (XX5,6)
Discount Schedule	DS2
GTIN	00785901684176
Nbr. of units in pkg.	1
Package weight(Lbs)	0.14000000000000001
Returnability	N
Country of origin	US


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1140 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold - Go to CaP for more details Go to CaP for more details

Contractual warranty


Warranty period	18 months
-----------------	-----------

Dimensions

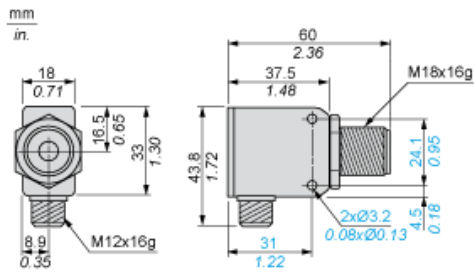

Minimum Mounting Distances

Side by side



e : respect the distances indicated on the detection curves


Wiring Diagram

3-Wire Type

NO outputs, PNP

- (1) (+)
 - (2) Teach input (WH)
 - (3) (-)
 - (4) Output
- BN Brown
WH White
BU Blue
BK Black

Curves

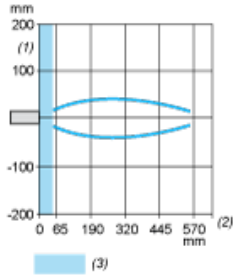

- (1) Parallel movement
- (2) Distance
- (3) Blind zone for diffuse sensors.