



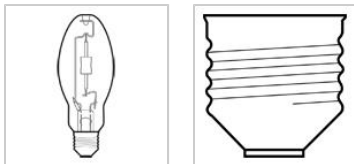

GE
Lighting

22137 - CMH100/C/U830MED

GE ConstantColor® CMH® Ceramic Metal Halide BD17

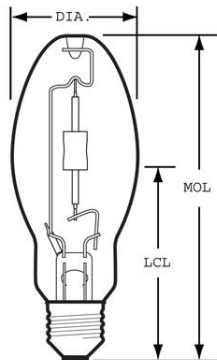

CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

Caution

- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not turn on lamp until fully installed.
 - Do not use beyond rated life.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Use in enclosed fixture rated for this product.
 - Use only properly rated ballast.

NOTES

- Rated life based on 11 hours per start

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Ceramic Metal Halide
Bulb	BD17
Base	Medium Screw (E26)
Bulb Finish	Coated
Rated Life (Vert)	10000.0 h
Rated Life (Hor)	15000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Enclosed fixtures only
Base Temperature (MAX)	190.0 °C
Bulb Temperature (MAX)	400.0 °C
LEED-EB MR Credit	77 picograms Hg per mean lumen hour

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	8700.0
Mean Lumens	6300.0
Nominal Initial Lumens per Watt	87
Color Temperature	3000.0 K
Color Rendering Index (CRI)	84.0
Effective Arc Length	0.3125 in

ELECTRICAL CHARACTERISTICS

Wattage	100.0
Burn Position	Universal burning position
Open Circuit Voltage (peak lead ballast) (MIN)	332.0 V
Open Circuit Voltage (RMS lag ballast) (MIN)	235.0 V
Warm Up Time to 90% (MIN)	2.0 min
Warm Up Time to 90% (MAX)	5.0 min
Hot Restart Time to 90%	15.0 min

DIMENSIONS

Maximum Overall Length (MOL)	5.4300 in(137.9 mm)
Nominal Length	5.430 in(137.9 mm)
Bulb Diameter (DIA)	2.165 in(55.0 mm)
Light Center Length (LCL)	3.386 in(86.0 mm)

PRODUCT INFORMATION

Product Code	22137
Description	CMH100/C/U830MED
ANSI Code	C90/ M90/ M140
Standard Package	Case
Standard Package GTIN	10043168221372
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	6
Package	
UPC	043168221375