


## XClamp and Duplex Receptacles

### Features

- Eliminates the need to loop the wire
- External back-wire clamp for fast and easy installation of 15A & 20A branch circuits in residential applications
- Compression plates maximize holding power to provide a stronger, more secure connection
- Terminate up to 8 wires
- Accommodates #12 & #14 AWG wire
- Break-off tabs for switched receptacle applications
- Tamper-resistant shutter complies with NEC®

## Best Solution for Residential 15A & 20A Branch Circuit Wiring

**Fast and Secure**

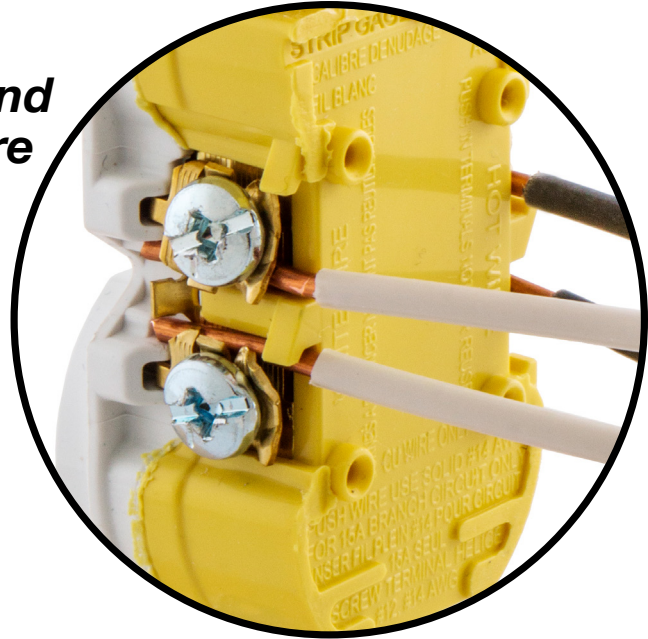

- 1** Strip the wire
- 2** Insert the wire
- 3** Clamp the connection



RR15SWTRX

### XClamp Duplex Receptacles

Description	Color	Catalog Number
Tamper-Resistant, 15A 125V, 2 Pole, 3 Wire Grounding, 20A Circuit Rated	Ivory Light Almond White	<b>RR15SITRX</b> <b>RR15SLATRX</b> <b>RR15SWTRX</b>

### Listings

UL listed to UL498 File No. E2186  
Certified to CSA C22.2, No. 42  
NEMA® WD-6 Compliant



RR15W

RR15QW

### Duplex Receptacles, 2 Pole, 3 Wire

Description	Tamper-Resistant, Quick Thread	Standard	Weather and Tamper-Resistant	Tamper-Resistant
	Termination	Self-Grounding, Push and Side Wire	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Black	—	<b>RR15BK</b>	<b>RR15SBKWRTR</b>	<b>RR15SBKTR</b>
Brown	—	<b>RR15</b>	<b>RR15SWRTR</b>	<b>RR15STR</b>
Gray	—	—	<b>RR15SGYWRTR</b>	—
Ivory	<b>RR15QITR</b>	<b>RR15I</b>	<b>RR15SIWRTR</b>	<b>RR15SITR</b>
Light Almond	<b>RR15QLATR</b>	<b>RR15LA</b>	<b>RR15SLAWRTR</b>	<b>RR15SLATR</b>
White	<b>RR15QWTR</b>	<b>RR15W</b>	<b>RR15SWWRTR</b>	<b>RR15SWTR</b>

NEC® is a registered trademark of the National Fire Protection Association (NFPA).