

3200 Series Midsized Fan Forced Wall Heater - Without Wall Box



SHOWN WITH BUILT-IN THERMOSTAT

Features

- Units have white powder coat finish.
- Approved for horizontal mounting - right or left discharge.
- Drywall depth embossments on back can.
- Powder coated 18 Gauge steel front.
- Manual reset thermal limit.
- Finned tubular steel element.
- Weight 6 lbs.
- Propeller style fan blade: 2200 RPM / 70 CFM.
- Optional field installed In-Built thermostat available.
- Rough in dimensions: 9-1/4" Wide, 12-1/8" High, 3-5/8" Deep.
- Grill dimensions: 9-25/32" Wide, 13" High.



Manufactured in U.S.A.

"TWO WIRE INSTALLATION"

Standard Models

UPC 686334	MODEL	VOLTS	WATTS	MAX BTU'S	AMPS	LIST
BUILT-IN DOUBLE POLE (POSITIVE OFF) THERMOSTAT 50° - 90° F RANGE						
383738	F3220T2W	208	2000	6826	9.6	227
383745	H3275T2W	240	750	2560	3.1	
383752	HF3210T2W	240/208	1000 / 750	3413 / 2560	4.2 / 3.6	
383769	HF3215T2W		1500 / 1125	5120 / 3840	6.3 / 5.4	
383776	HF3220T2W		2000 / 1500	6826 / 5120	8.3 / 7.2	
383783	HF3222T2W		2250 / 1688	7680 / 5762	9.4 / 8.1	
BUILT-IN SINGLE POLE (POSITIVE OFF) THERMOSTAT 50° - 90° F RANGE						
383790	E3275TW	120	750	2560	6.25	213
383806	E3210TW		1000	3413	8.33	
383813	E3215TW		1500	5120	12.5	
NO BUILT-IN THERMOSTAT						
383820	E3275W	120	750	2560	6.25	193
383837	E3210W		1000	3413	8.33	
383844	E3215W		1500	5120	12.5	
383851	F3220W	208	2000	6826	9.6	
383868	H3275W	240	750	2560	3.1	
383875	HF3210W	240/208	1000 / 750	3413 / 2560	4.2 / 3.6	
383882	HF3215W		1500 / 1125	5120 / 3840	6.3 / 5.4	
383899	HF3220W		2000 / 1500	6826 / 5120	8.3 / 7.2	
383905	HF3222W		2250 / 1688	7680 / 5762	9.4 / 8.1	

Accessories

FIELD INSTALLED COMPONENTS			
UPC 686334	MODEL	DESCRIPTION	LIST
383646	32T1	Single Pole thermostat with positive off for 120V units 50° - 90° F	46
383653	32T2	Double Pole thermostat with positive off for 240/208V units 50° - 90° F	52


SURFACE MOUNTED EXTENDERS & FRAMES			
WHITE		DESCRIPTION	LIST
UPC 686334	MODEL		
996976	303EX8RW	1" EXTENDER	37
996969	303EX16RW	2" EXTENDER	38
996952	303EX32RW	4" SURFACE MOUNT FRAME	44

WALL BOXES			
UPC 686334	MODEL	QUANTITY	LIST
996808	30WB	1	27
996792	30WB-5	5	132

4300 Series Low Profile Fan Forced Wall Heater - With Wall Box



WITH IN-BUILT THERMOSTAT

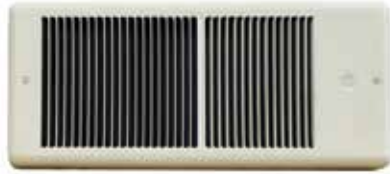

WITHOUT IN-BUILT THERMOSTAT

Features

- Available in ivory or white.
- Powder coated 20 Gauge steel front.
- Manual reset thermal limit.
- Finned tubular steel element.
- Weight 9 lbs.
- Propeller style fan blade - 2200 RPM / 70 CFM
- Rough in dimensions: 14-1/2" Wide, 7-1/8" High, 3-1/2" Deep
- Grill dimensions: 16-3/4" Wide, 7-5/8" High
- Unit not approved for ceiling mount applications.
- Unit can be positioned to allow left, right or top discharge.



Manufactured in U.S.A.

Standard Models

IVORY		WHITE		VOLTS	WATTS	MAX BTU's	AMPS	LIST
UPC 686334	MODEL	UPC 686334	MODEL					
DOUBLE POLE IN-BUILT THERMOSTAT (RANGE 50° - 90°F)								
327695	F4320T2RP	327749	F4320T2RPW	208	2000	6826	9.6	240
327701	HF4375T2RP	327756	HF4375T2RPW	240/208	750 / 562	2560 / 1920	3.1 / 2.7	
327718	HF4310T2RP	327763	HF4310T2RPW		1000 / 750	3413 / 2560	4.2 / 3.6	
327725	HF4315T2RP	327770	HF4315T2RPW		1500 / 1125	5120 / 3840	6.3 / 5.4	
327732	HF4320T2RP	327787	HF4320T2RPW		2000 / 1500	6826 / 5120	8.3 / 7.2	
International Models - DOUBLE POLE IN-BUILT THERMOSTAT (RANGE 50° - 90°F)								
----	----	396448	M4375T2RPi	220	630	2150	2.9	240
----	----	396455	M4310T2RPi		840	2869	3.8	
----	----	396462	M4315T2RPi		1260	4300	5.7	
----	----	396479	M4320T2RPi		1680	5733	7.6	
Standard Models - SINGLE POLE INBUILT THERMOSTAT (RANGE 50° - 90°F)								
327794	E4375TRP	327879	E4375TRPW	120	750	2560	6.25	225
327800	E4310TRP	327886	E4310TRPW		1000	3413	8.33	
327817	E4315TRP	327893	E4315TRPW		1500	5120	12.5	
327824	F4320TRP	327909	F4320TRPW	208	2000	6826	9.6	
327831	HF4375TRP	327916	HF4375TRPW	240/208	750 / 562	2560 / 1920	3.1 / 2.7	
327848	HF4310TRP	327923	HF4310TRPW		1000 / 750	3413 / 2560	4.2 / 3.6	
327855	HF4315TRP	327930	HF4315TRPW		1500 / 1125	5120 / 3840	6.3 / 5.4	
327862	HF4320TRP	327947	HF4320TRPW		2000 / 1500	6826 / 5120	8.3 / 7.2	
NO IN-BUILT THERMOSTAT								
327954	E4375RP	328036	E4375RPW	120	750	2560	6.25	204
327961	E4310RP	328043	E4310RPW		1000	3413	8.33	
327978	E4315RP	328050	E4315RPW		1500	5120	12.5	
327985	F4320RP	328067	F4320RPW	208	2000	6826	9.6	
327992	HF4375RP	328074	HF4375RPW	240/208	750 / 562	2560 / 1920	3.1 / 2.7	
328005	HF4310RP	328081	HF4310RPW		1000 / 750	3413 / 2560	4.2 / 3.6	
328012	HF4315RP	328098	HF4315RPW		1500 / 1125	5120 / 3840	6.3 / 5.4	
328029	HF4320RP	328104	HF4320RPW		2000 / 1500	6826 / 5120	8.3 / 7.2	

Accessories

UPC 686334	IVORY MODEL	UPC 686334	WHITE MODEL	ACCESSORY OPTIONS	WT. LBS.	LIST
327657	4300EX8	328456	4300EX8W	1" SEMI RECESSING EXTENDER	2	43
327664	4300EX16	328463	4300EX16W	2" SEMI RECESSING EXTENDER	3	46
327671	4300EX32	328470	4300EX32W	4" SURFACE MOUNTING FRAME	4	49
327688	4300P	328487	4300PW	WALL PLATE ADAPTOR (OD 21.5" x 12.25")	1	31
FIELD INSTALLED THERMOSTATS		329774	43T	SINGLE POLE THERMOSTAT 50° - 90° F	1	46
		329781	43T2	DOUBLE POLE THERMOSTAT 50° - 90° F	1	52