

Thin wall conduit fittings (for EMT conduit)

Combination couplings

EMT fittings

COMBINATION COUPLINGS – STEEL

Standard material:

- Steel

Standard finish:

- Zinc plated

EMT (set screw) to rigid (set screw)

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
420	1/2" - 1/2"	25	17
421	3/4" - 3/4"	20	25
422	1" - 1"	10	37

COMBINATION COUPLINGS – STEEL

Concrete tight

EMT (compression) to rigid (threaded)

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
690S	1/2" - 1/2"	25	9
691	3/4" - 3/4"	20	13
692	1" - 1"	10	19

COMBINATION COUPLINGS – ZINC DIE CAST

EMT (set screw) to FMC (clamp)

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
780DC	1/2" - 3/8"	50	8

FLEXIBLE METALLIC COMBINATION COUPLINGS – ZINC DIE CAST

Set screw squeeze type

EMT (set screw) to FMC (clamp)

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
FECS38DC	1/2" - 3/8"	50	34
FECS50DC	1/2" - 1/2"	25	22
FECS75DC	3/4" - 3/4"	25	36

Compression coupling

EMT (compression) to FMC (screw-in)

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
FECC50DC	1/2" - 1/2"	50	41
FECC75DC	3/4" - 3/4"	25	31
FECC100DC	1" - 1"	25	46

Thin wall conduit fittings (for EMT conduit)

Combination couplings

ACC SERIES COMBINATION COUPLINGS – STEEL

Applications:

- Used to join EMT conduit to armoured cable, metal-clad cable or flexible metallic conduit

Features:

- Dual gripping saddle design on the coupling safely secures cable or conduit in place and prevents loosening from vibration
- Steel compression ring and nut provide a strong, secure termination point for EMT conduit
- #2 tri-head set screw may be installed using a slotted, Phillips or Robertson head screwdriver
- Steel combination coupling is zinc electroplated for corrosion resistance

Certifications and compliances:

- UL Listed
- cUL Listed

Standard materials and finishes:


- Body – steel, zinc electroplated
- Saddle – steel, zinc electroplated
- Screw – steel, zinc electroplated

Compression coupling AC/MC, FMC to EMT



Cat. #	Trade size	Cable opening		Unit qty.	Wt. Lbs. Per 100
		Max.	Min.		
ACC38	3/8" - 1/2"	0.656	0.437	25	10
ACC50	1/2" - 3/4"	0.937	0.750	10	13
ACC75	3/4" - 1"	1.125	0.906	10	16

Dimensions (in inches):

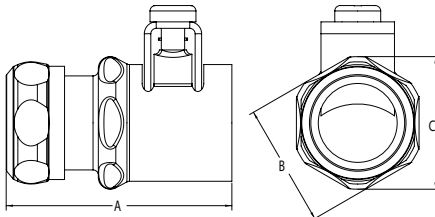

Cat. #	A	B	C
ACC38	1.65	1.05	1.13
ACC50	2.09	1.14	1.23
ACC75	2.15	1.30	1.39


Set screw coupling:



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
ACCSS38	3/8" - 1/2"	25	9
ACCSS50	1/2" - 3/4"	10	12
ACCSS75	3/4" - 1"	10	14

Ⓞ Not UL Listed.

Dimensions (in inches):



Cat. #	A		B		C	
	Min.	Max.	Min.	Max.	Min.	Max.
ACCSS38	0.656	0.437	N/A	N/A	0.712	0.730
ACCSS50	0.937	0.750	0.560	0.620	0.712	0.730
ACCSS75	1.125	0.906	0.742	0.813	0.930	0.942