

Product availability : Stock - Normally stocked in distribution facility

Price* : 2415.00 USD



Main

Range of product	Modicon Quantum
Product or component type	Ethernet RIO head for Quantum
Number of port	4
Integrated connection type	Ethernet IP/Modbus TCP (service port) Ethernet IP/Modbus TCP (interlink port) Ethernet IP/Modbus TCP (device network)
Communication port protocol	Ethernet IP/Modbus TCP
Communication service	Allows PLC to connect to an Ethernet network RSTP support Configure IP parameters Diagnostics for remote I/O devices Configuration for remote I/O devices

Complementary

Topology	Daisy chain loop
Local signalling	1 LED green activity 1 LED green ready 1 LED green/red module status (Mod Status) 1 LED green/red network communication status (Net Status)
Product compatibility	140CPU65260 140CPU67160 140CPU65160 140CPU65150 140CPU67261
Environmental characteristic	Hazardous location class I division 2 conforming to EN/IEC 61131-1 Standard environment
Width	6.57 in (167 mm)
Height	1.97 in (50 mm)
Product weight	1.22 lb(US) (0.554 kg)

Environment

Product certifications	CE C-Tick UL 508
Standards	IEC 61000-4-16 EN 55011 CSA C22.2 No 142
IP degree of protection	IP20 conforming to EN 61131-2 IP20 conforming to IEC 60527
Overvoltage category	Class I conforming to EN 61131-2
Ambient air temperature for operation	32...140 °F (0...60 °C) conforming to IEC 60068-2-1 32...140 °F (0...60 °C) conforming to IEC 60068-2-2
Ambient air temperature for storage	-40...185 °F (-40...85 °C) conforming to IEC 60068-2-1 -40...185 °F (-40...85 °C) conforming to IEC 60068-2-2
Vibration resistance	3.5 mm constant amplitude (f=0.5...8.4 Hz) conforming to EN 61131-2 1 gn constant acceleration (f=8.4...150 Hz) conforming to EN 61131-2
Operating altitude	6561.68 ft (2000 m)
Altitude transport	9842.52 ft (3000 m)
Relative humidity	93 % conforming to IEC 60068

Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901932512
Nbr. of units in pkg.	1
Package weight(Lbs)	1.21
Returnability	Y
Country of origin	FR

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1107 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

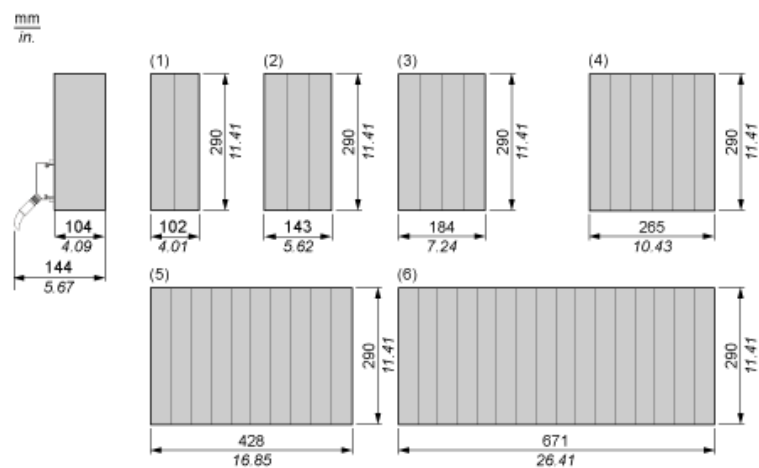

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots