





WIRE & CABLE PULLING GRIPS FROM HUSKIE TOOLS

HOT LINE MODEL

STANDARD MODEL

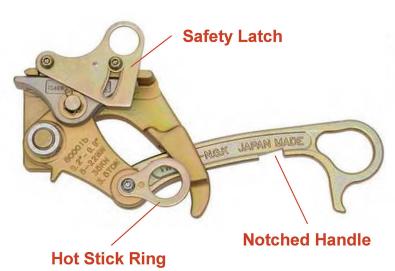

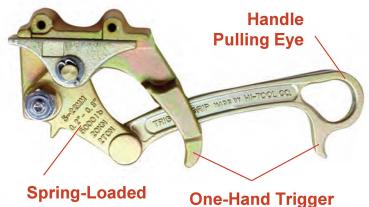

HOT LINE POWER GRIPS™ - with SPRING-LOADED SAFETY LATCH, HOT STICK RING, & NOTCHED HANDLE

| CATALOG # | CABLE DIAMETER | CAPACITY | SPRING Loaded | TRIGGER GRIP | SAFETY Latch | HOT-STICK RING | NOTCHED Handle | GRIP/STYLE | JAW PROFILE/TEETH | JAW LENGTH | WEIGHT |
|-------------|-----------------------------------|----------|------------------|-----------------|-----------------|-------------------|-------------------|--------------|-------------------|----------------|-----------------|
| For Bare Al | uminum, ACSR, ACSS, AAC, & Copper | | | | | | | | | | |
| TG-451R | 0.2" to 0.87" (5 mm to 22 mm) | 5000 lbs | ✓ | ✓ | ✓ | ✓ | ✓ | Parallel Jaw | Rounded/Standard | 3.5" (90 mm) | 3.3 lb (1,5 kg) |
| TG-461R | 0.2" to 0.87" (5 mm to 22 mm) | 8000 lbs | ✓ | ✓ | ✓ | ✓ | ✓ | Parallel Jaw | Rounded/Standard | 3.5" (90 mm) | 3.8 lb (1,7 kg) |
| TG-481R | 0.7" to 1.38" (18 mm to 35 mm) | 9000 lbs | ✓ | ✓ | ✓ | ✓ | ✓ | Parallel Jaw | Rounded/Standard | 4.75" (120 mm) | 5.2 lb (2,4 kg) |

STANDARD POWER GRIPS™

| STANDARD POWER GRIPS | | | | | | | | | | | |
|---|--------------------------------|-----------|------------------|-----------------|-----------------|-------------------|-------------------|--------------|--------------------|----------------|------------------|
| CATALOG # | CABLE DIAMETER | CAPACITY | SPRING Loaded | TRIGGER GRIP | SAFETY LATCH | HOT-STICK RING | NOTCHED Handle | GRIP/STYLE | JAW PROFILE/TEETH | JAW LENGTH | WEIGHT |
| For Bare Aluminum, ACSR, ACSS, AAC, & Copper | | | | | | | | | | | |
| TG-45M | 0.2" to 1.1" (5 mm to 28 mm) | 5000 lbs | ✓ | ✓ | - | - | 8 <u>#</u> () | Parallel Jaw | Rounded/Standard | 4.75" (120 mm) | 4.2 lb (1,9 kg) |
| TG-45MSL | 0.2" to 1.1" (5 mm to 28 mm) | 5000 lbs | ✓ | ✓ | ✓ | - | - | Parallel Jaw | Rounded/Standard | 4.75" (120 mm) | 4.4 lb (2,0 kg) |
| TG-48 | 0.7" to 1.38" (18 mm to 35 mm) | 9000 lbs | ✓ | ✓ | - | - | - | Parallel Jaw | Rounded/Standard | 4.75" (120 mm) | 5.2 lb (2,4 kg) |
| *TG-47 | 0.7" to 1.4" (18 mm to 36 mm) | 13000 lbs | \checkmark | - | - | - | - | Parallel Jaw | Rounded/Standard | 7.0" (180 mm) | 9.9 lb (4,5 kg) |
| For Bare Aluminum, ACSR, ACSS, AAC, Copper, & Guy Strand | | | | | | | | | | | |
| TG-25 | 0.1" to 0.6" (2.6 mm to 15 mm) | 2200 lb | ✓ | ✓ | - | - | - | Parallel Jaw | Rounded/Fine | 2.0" (51 mm) | 1.3 lbs (0,6 kg) |
| TG-30 | 0.2" to 0.87" (5 mm to 22 mm) | 3000 lbs | ✓ | ✓ | - | - | - | Parallel Jaw | Rounded/Fine | 2.75" (70 mm) | 2.2 lb (1,0 kg) |
| TG-45 | 0.2" to 0.87" (5 mm to 22 mm) | 5000 lbs | ✓ | ✓ | - | - | - | Parallel Jaw | Rounded/Fine | 3.5" (90 mm) | 3.3 lb (1,5 kg) |
| TG-46 | 0.2" to 0.87" (5 mm to 22 mm) | 8000 lbs | ✓ | ✓ | - | - | - | Parallel Jaw | Rounded/Fine | 3.5" (90 mm) | 3.8 lb (1,7 kg) |
| For Covered Cable, Copper Cable, Guy Strand, Steel Strand, Messenger, Tree Cable, Wire Rope & EHS | | | | | | | | | | | |
| TG-45A | 0.2" to 0.87" (5 mm to 22 mm) | 5000 lbs | ✓ | \checkmark | - | - | - | Parallel Jaw | Rounded/Aggressive | 3.5" (90 mm) | 3.3 lb (1,5 kg) |
| TG-46A | 0.2" to 0.87" (5 mm to 22 mm) | 8000 lbs | ✓ | ✓ | | - | - | Parallel Jaw | Rounded/Aggressive | 3.5" (90 mm) | 4.0 lb (1,8 kg) |
| *TG-20 | 0.1" to 0.59" (2.6mm to 15mm) | 2200 lbs | - | ✓ | - | = | - | Bulldog Jaw | Flat/Aggressive | 0.25" (6.4 mm) | 1.3 lb (0,6 kg) |
| | | | | | | | | | | | |

^{*}TG-47 features patented TWIST-GRIP™ straight-pull handle to prevent cable damage and distortion.

^{*}TG-20 should not be used for Wire Rope and EHS.



WIRE & CABLE PULLING GRIPS

MODELS AVAILABLE FOR BARE ALUMINUM, ACSR, ACSS, AAC & COPPER or COVERED CABLE, GUY STRAND, STEEL STRAND, STEEL STRAND, MESSENGER, TREE CABLE, WIRE ROPE, & EHS

"BUILT FOR EVERYTHING THAT'S ON THE LINE"



WIRE & CABLE PULLING GRIPS FROM HUSKIE TOOLS

SAFETY IS JOB #1 when working with wire and cable for Utility applications.
POWER GRIPS™ from Huskie Tools are designed with safety in mind and constructed to help keep lineworkers safe on the job.

POWER GRIPS™ are the most versatile wire and cable pulling grips on the market. They're designed to work with a wide variety of cable sizes and types, reducing the number of grips needed to get the job done safely and efficiently.

Available in capacities from 2,200 to 13,000 lbs., Huskie Tools carries the industries' most popular wire and cable pulling grip sizes.



POWER GRIPS... FEATURES

PARALLEL JAW DESIGN

Provides enhanced gripping surface with exceptional pull strength

RIGHT-SIZED PULLING EYE

Accepts broad range of hooks on winches and tackle blocks

WIDE-RANGE CAPACITY

Allows use on expanded range of cable sizes and types

FORGED ALLOY STEEL

High-strength lightweight design with long-lasting durability

PATENTED TRIGGER GRIP

Allows efficient one-hand placement on wire and cable

YELLOW CHROMATE FINISH

Provides superior protection against rust and corrosion









WIRE & CABLE PULLING GRIPS

MODELS AVAILABLE FOR BARE ALUMINUM, ACSR, ACSS, AAC & COPPER or COVERED CABLE, GUY STRAND, STEEL STRAND, STEEL STRAND, MESSENGER, TREE CABLE, WIRE ROPE, & EHS

"BUILT FOR EVERYTHING THAT'S ON THE LINE"