



LED Highbay

165HB/LED/850/D WB UDL BB G2 4/1

Philips LED high bay lamps are a direct replacement for 250W to 400W metal halide lamps which will deliver substantial energy savings. Philips LED HighBays delivers bright, clean light for a fraction of the energy used by conventional HID.

Product data

General Information	
Cap-Base	EX39 [Exclusionary Mogul Screw]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	120 degree(s)
Luminous Flux	25,000 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	151.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	165 W
Lamp Current (Nom)	1,650 mA
Starting Time (Nom)	0.5 s

Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
UL Type	HIB_UL Type B (UL Listed+Classified)

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	58 °C

Controls and Dimming	
Dimmable	Only with specific dimmers

Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Plastic
Bulb Shape	Others

Application Conditions	
can it be used in closed luminaires	Yes


Product Data	
Order product name	165HB/LED/850/D WB UDL BB G2 4/1
Full product name	165HB/LED/850/D WB UDL BB G2 4/1
Order code	929002496704

LED Highbay

Material Nr. (12NC)	929002496704
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677564001
Numerator - Packs per outer box	4



EAN/UPC - Case	50046677564006
----------------	----------------

Dimensional drawing




Product	D	C
165HB/LED/850/D WB UDL BB G2 4/1	250 mm	295 mm

Photometric data

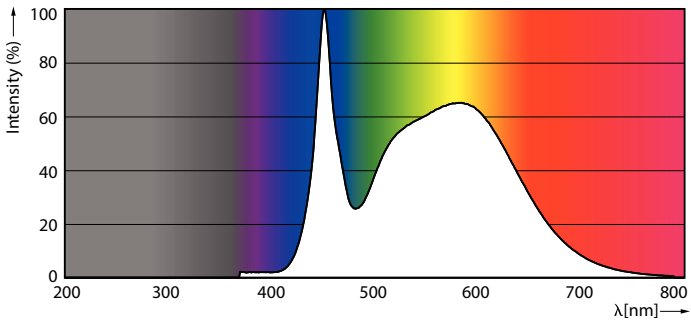

Spectral Power Distribution Colour - 165HB/LED/850/D WB UDL BB G2 4/1


General uniform lighting - 165HB/LED/850/D WB UDL BB G2 4/1




Light Distribution Diagram - 165HB/LED/850/D WB UDL BB G2 4/1

LED Highbay

Lifetime

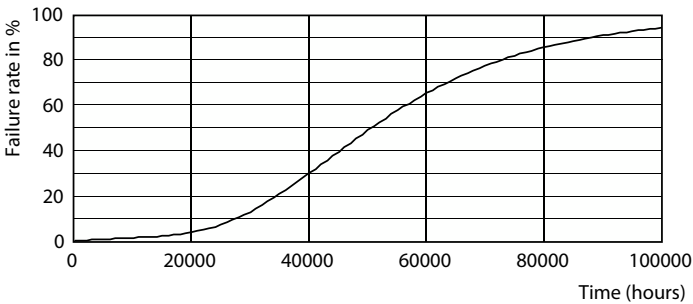

Life Expectancy Diagram - 165HB/LED/850/D WB UDL BB G2 4/1

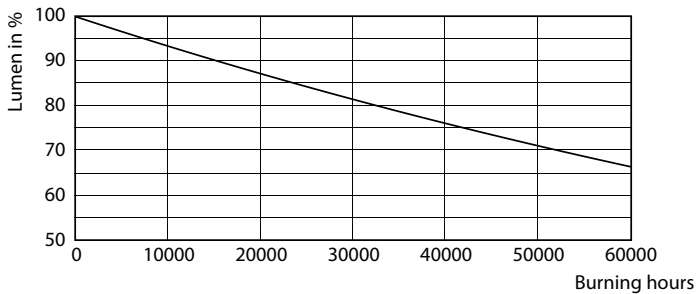

Lumen Maintenance Diagram - 165HB/LED/850/D WB UDL BB G2 4/1

