



LED PAR38

17PAR38/EXPERTCOLOR/S8/940/DIM/120V

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General Information		
Cap-Base	E26 [Single Contact Medium Screw]	
Nominal lifetime	40,000 hour(s)	
Switching Cycle	50,000	
Lighting Technology	LED	
Light Technical		
Color Code	940 [CCT of 4000K]	
Beam Angle (Nom)	8 degree(s)	
Luminous Flux	1,300 lm	
Luminous Intensity (Nom)	25,000 cd	
Luminous Efficacy (rated) (Nom)	76.47 lm/W	
Color Designation	Cool White (CW)	
Correlated Color Temperature (Nom)	4000 K	
Color Consistency	<6	
Color rendering index (CRI)	95	
LLMF At End Of Nominal Lifetime (Nom)	70 %	
Operating and Electrical		
Line Frequency	60 Hz	
Input Frequency	60 Hz	
Power Consumption	17 W	
Lamp Current (Nom)	170 mA	
Wattage Equivalent	100 W	

Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	90 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Plastic
Bulb Shape	PAR38
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	Energy Star
EU RoHS compliant	Yes
Product Data	
Order product name	17PAR38/EXPERTCOLOR/S8/940/DIM/120V


Datasheet, 2024, April 26 data subject to change

LED PAR38

Full product name	17PAR38/EXPERTCOLOR/S8/940/DIM/120V
Order code	929001369804
Material Nr. (12NC)	929001369804
Numerator - Quantity Per Pack	1
Net Weight (Piece)	0.425 kg


EAN/UPC - Product/Case	046677471798
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677471793


Dimensional drawing



Product	D	С
17PAR38/EXPERTCOLOR/S8/940/DIM/120V	120.7 mm	134.6 mm


Photometric data

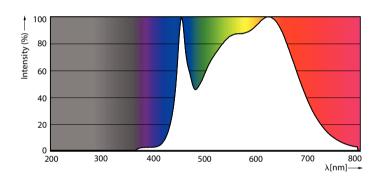



Spectral Power Distribution Colour - 17PAR38/EXPERTCOLOR/ S8/940/DIM/120V


Accent Lighting Spots - 17PAR38/EXPERTCOLOR/S8/940/DIM/120V




Light Distribution Diagram - 17PAR38/EXPERTCOLOR/S8/940/DIM/120V

LED PAR38

Lifetime

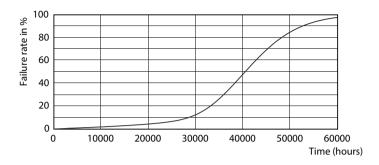



ExpertColor PAR38 30S 30L Dim 120V Life Expectancy Diagram

Lumen Maintenance Diagram - 17PAR38/EXPERTCOLOR/S8/940/DIM/120V

