

Project: Type: Prepared By: Date:



#### **Features and Benefits**

Produces rich and vibrant colors >90CRI

Energy efficient replacement for incandescent and halogen PAR lamps

Constructed from durable materials which lowers risk of breakage

Rated for use in enclosed and open fixtures in dry and damp locations  $\!\!\!\!^*$ 

Single optic and full face lens for precise beam angle control

 $Longer\,life span\,compared\,to\,legacy\,equivalents\,minimizes\,replacement\,and\,maintenance\,costs$ 

Title 20 Compliant, UL Listed

Dimmable down to 10% (check dimmer compatibility list)

\*PAR38 is wet rated

## **Technical Specifications**

Performance

**Product Type:** 

PAR

Input Wattage:

11W

Lumens (Nominal):

900

Efficacy:

82 lm/W

Color Accuracy:

90 CRI

**Color Temperature:** 

4000K

Dimmable:

Yes, down to 10%

L70 Lifespan:

25,000-Hour LED lifespan based on IES LM-70 results

Construction

**Bulb Shape:** 

PAR30S

Enclosure Material:

Plastic

**Housing Finish:** 

White

Base Type:

E26

Beam Angle:

40°

Optical

MBCP:

1315

Electrical

**Power Factor:** 

>0.9

Input Voltage:

120V

**Operating Temperature:** 

-20°C - 40°C



# **Technical Specifications (continued)**

Other

**Equivalency:** 

75W

Technology EQ:

Halogen

Warranty (Years):

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="mailto:rable-trans-rable-

Compliance

**UL Listed:** 

Yes

**Environment/Fixture Rating:** 

Damp / Enclosed

T20 Compliant:

Yes, Title 20 Tier 2

T24 JA8 Compliant:

Complies with Title 24 Appendix JA8

Rohs:

Mercury and UV free. RoHS-compliant components.

FCC:


Complies with Part 15 of the FCC Rules

**Model Number:** 

P10013(PAR30S-11-940-40D-DIM)

### **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	6	12.8	8.5	4.7
PALLET	864	46.7	38.4	37.8

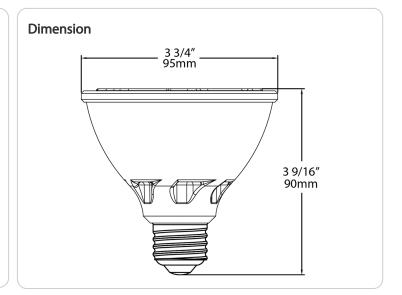

# PAR30S-11-940-40D-DIM



