

## SPECIFICATION & FEATURES

## CABLE/CONDUIT TO ROD/WIRE CLIPS 1/2" ~ 1-1/4" EMT

### DESCRIPTION:


Orbit Industries' cable/conduit to rod/wire clips can be easily installed to flanges, rods or wire by hand to support conduits or cables. Spring steel tightening structure can keep conduits and cables stable on rods or wire and prevent wagging of electrical raceways.

### CERTIFICATION:

UL file E328572, conforms to UL 2239.

### FEATURES:

- Spring Steel
- Support conduits to rods, wire or flanges
- Can be used for flexible metallic tubing, armored cables, portable cables, control tubes and communication cables
- Available for EMT, rigid, aluminum and NM conduits
- No tools needed for installation

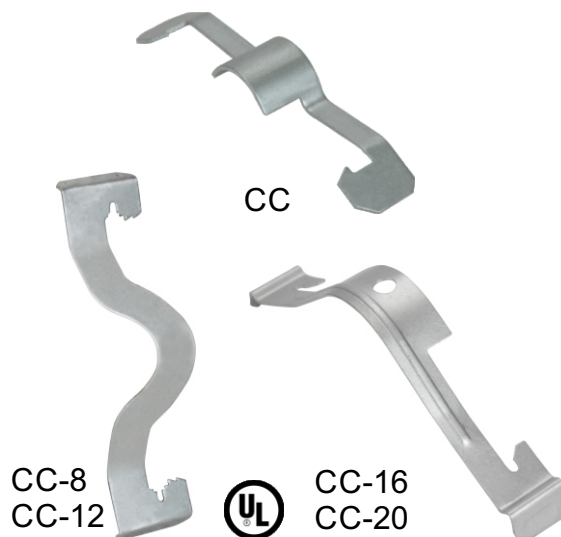

### CONFIGURATION DATA:

Part No.	Load Capacity			Std. Pkg.	Master CTN
	Vertical Wire/Rod	Horizontal Flange	Vertical Flange		
CC	-	-	-	100	1000
CC-8	50 LB	100 LB	15 LB	100	1000
CC-12	50 LB	100 LB	15 LB	100	1000
CC-16	50 LB	100 LB	15 LB	100	1000
CC-20	50 LB	100 LB	22 LB	100	-

Cable Size	#12 Wire	#8, #9, #10 Wire
14-2, 14-3, 12-2	CC	CC
12-3	CC	CC-8

Conduit Size	#10, #12 Wire	#8, #9 Wire	3/16", 1/4" Rod	1/8" ~ 1/4" Flange	5/16" ~ 3/8" Flange	7/16" ~ 1/2" Flange
1/2" EMT	CC-8	CC-8	CC-8	CC-8	CC-12	CC-12
1/2" Rigid	CC-8	CC-12	CC-12	CC-12	CC-12	CC-16
3/4" EMT	CC-12	CC-12	CC-12	CC-12	CC-16	CC-16
3/4" Rigid	CC-12	CC-12	CC-16	CC-16	CC-20	CC-20
1" EMT	-	CC-16	CC-16	CC-16	CC-20	CC-20
1" Rigid	-	-	-	CC-20	CC-20	CC-20
1-1/4" EMT	-	CC-20	CC-20	CC-20	-	-

