

## Heavy Duty Support Grips

Double Eye, Double Weave, Tin-Coated Bronze and Stainless Steel.


**IMPORTANT:**  
Read all breaking strength, safety and technical data relating to this product.

Refer to pages W-33 and W-34.

### Double Eye, Closed Mesh

For permanent support when cable end is available to be installed through grip.


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		Working Load Lbs.		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel	Tin-Coated Bronze	Stainless Steel				
.75"-1.99" (1.90-2.51)	2,820	4,250	282	425	10" (25.40)	25" (63.50)	<b>02206001</b>	<b>02406001</b>
1.00"-1.24" (2.54-3.15)	4,280	7,300	428	730	10" (25.40)	28" (71.12)	<b>02206002</b>	<b>02406002</b>
1.25"-1.49" (3.17-3.78)	4,280	7,300	428	730	10" (25.40)	30" (76.20)	<b>02206003</b>	<b>02406003</b>
1.50"-1.99" (3.81-5.05)	4,280	11,100	428	1,110	10" (25.40)	34" (86.36)	<b>02206004</b>	<b>02406004</b>
2.00"-2.49" (5.08-6.32)	8,050	20,100	805	2,010	12" (30.48)	36" (91.44)	<b>02206005</b>	<b>02406005</b>
2.50"-2.99" (6.35-7.59)	8,050	20,100	805	2,010	12" (30.48)	38" (96.52)	<b>02206006</b>	<b>02406006</b>
3.00"-3.49" (7.62-8.86)	10,060	25,200	1,006	2,520	12" (30.48)	40" (101.60)	<b>02206007</b>	<b>02406007</b>
3.50"-3.99" (8.89-10.13)	12,070	—	1,207	—	12" (30.48)	44" (111.76)	<b>02206008</b>	—
4.00"-4.49" (10.16-11.40)	12,070	—	1,207	—	12" (30.48)	46" (116.84)	<b>02206009</b>	—
4.50"-4.99" (11.43-12.67)	12,070	—	1,207	—	12" (30.48)	68" (172.72)	<b>02208009</b>	—

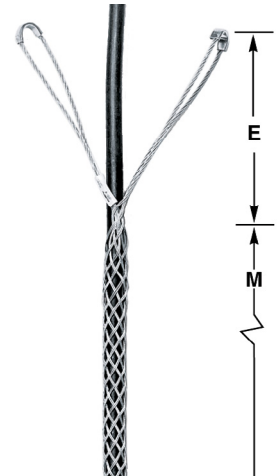

### Double Eye, Split Mesh, Lace Closing

For support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		Working Load Lbs.		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel	Tin-Coated Bronze	Stainless Steel				
.75"-1.99" (1.90-2.51)	2,820	4,250	282	425	10" (25.40)	25" (63.50)	<b>02207001</b>	<b>02407001</b>
1.00"-1.24" (2.54-3.15)	4,280	7,300	428	730	10" (25.40)	28" (71.12)	<b>02207002</b>	<b>02407002</b>
1.25"-1.49" (3.17-3.78)	4,280	7,300	428	730	10" (25.40)	30" (76.20)	<b>02207003</b>	<b>02407003</b>
1.50"-1.99" (3.81-5.05)	4,280	11,150	428	1,110	10" (25.40)	34" (86.36)	<b>02207004</b>	<b>02407004</b>
2.00"-2.49" (5.08-6.32)	8,050	20,150	805	2,010	12" (30.48)	36" (91.44)	<b>02207005</b>	<b>02407005</b>
2.50"-2.99" (6.35-7.59)	8,050	20,150	805	2,010	12" (30.48)	38" (96.52)	<b>02207006</b>	<b>02407006</b>
3.00"-3.49" (7.62-8.86)	10,060	25,200	1,006	2,520	12" (30.48)	40" (101.60)	<b>02207007</b>	<b>02407007</b>
3.50"-3.99" (8.89-10.13)	12,070	30,200	1,207	3,020	12" (30.48)	44" (111.76)	<b>02207008</b>	<b>02407008</b>
4.00"-4.49" (10.16-11.40)	12,070	30,200	1,207	3,020	12" (30.48)	46" (116.84)	<b>02207009</b>	<b>02407009</b>
4.50"-4.99" (11.43-12.67)	12,070	—	1,207	—	12" (30.48)	68" (172.72)	<b>02209009</b>	—

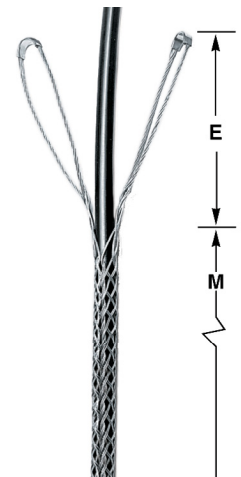

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)